
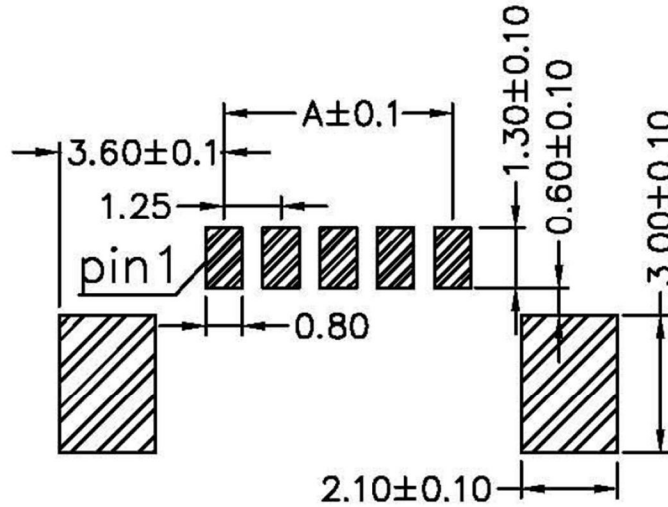


CUSTOMER COPY




REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-11-11

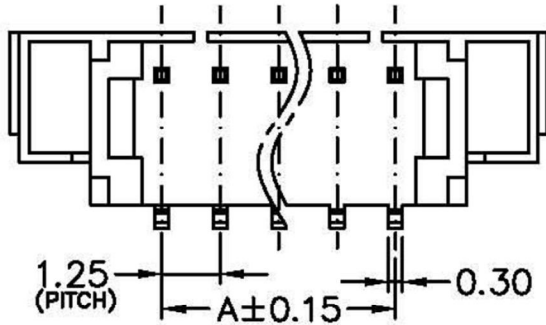


MATERIAL
 WAFER: NYLON 46 UL 94V-0 OR LCP
 CONTACTS: BRASS
 PLATING: TIN OVER NICKEL

SPECIFICATION
 CURRENT RATING: 1A AC,DC
 VOLTAGE RATING: 250V AC,DC
 OPERATING TEMPERATURE: -25°C~+85°C
 Contact Resistance: 20mΩ Max
 INSULATION RESISTANCE: 1000M MIN
 WITHSTANDING VOLTAGE: 500V AC/MINUTE

RECOMMENDED P.C.B LAYOUT

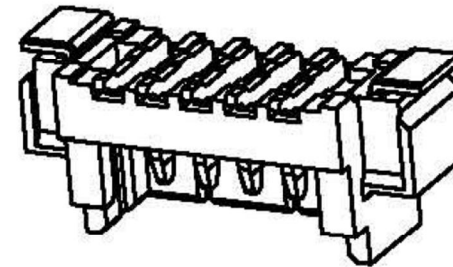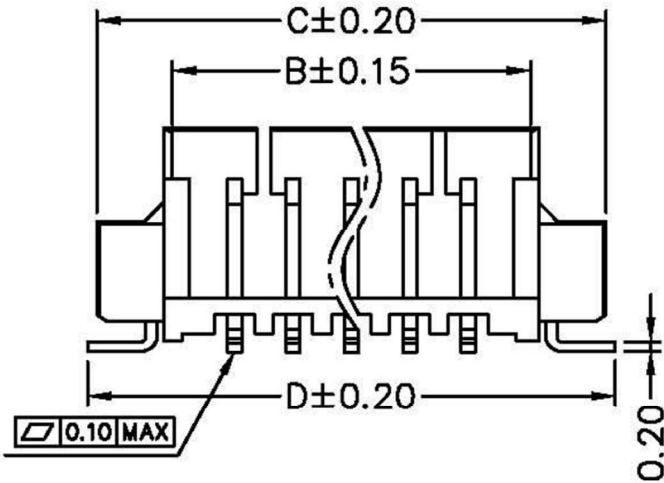

NO	A	B	C	D
02P	1.25	3.10	7.35	7.55
03P	2.50	4.35	8.60	8.80
04P	3.75	5.60	9.85	10.05
05P	5.00	6.85	11.10	11.30
06P	6.25	8.10	12.35	12.55
07P	7.50	9.35	13.60	13.80
08P	8.75	10.60	14.85	15.05
09P	10.00	11.85	16.10	16.30
10P	11.25	13.10	17.35	17.55
11P	12.50	14.35	18.60	18.80
12P	13.75	15.60	19.85	20.05
13P	15.00	16.85	21.10	21.30
14P	16.25	18.10	22.35	22.55
15P	17.50	19.35	23.60	23.80
16P	18.75	20.60	24.85	25.05

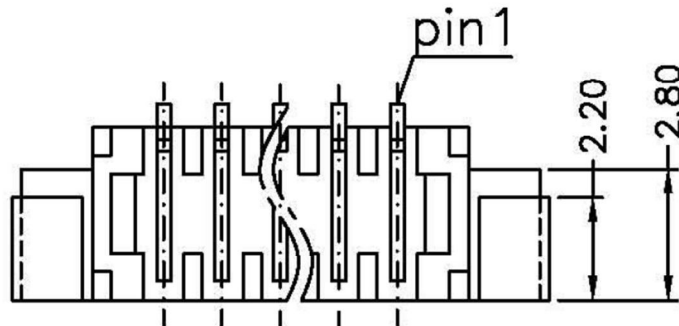

ORDER INFORMATION
 1204 0 11 XX 1

- 1: Plating Tin
- No. of Contact
- 180° SMT 半耳 Type



鈺滿榮企業股份有限公司 ACME LUX CO., LTD.
 TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: MX1.25 180° SMT Type Wafer Connector	PART NO:
0.00±0.20	UNT: mm		APP BY: Hung
0.000±0.1			CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos

DWG. NO. C1204011XX1