



CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-03-24

ORDER INFORMATION



1204 5 00 XX X

- 1:Plating Tin
- No. of Contact
- 00:90° DIP
- 5:1250 Type

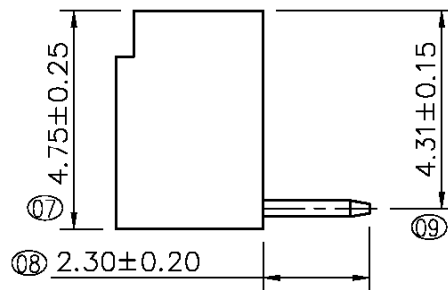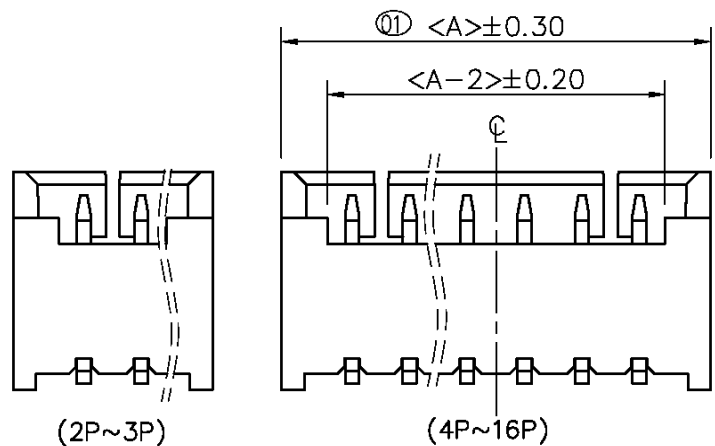

PART NO.	Dimensions	
	A	B
02	4.25	1.25
03	5.50	2.50
04	6.75	3.75
05	8.00	5.00
06	9.25	6.25
07	10.50	7.50
08	11.75	8.75
09	13.00	10.00
10	14.25	11.25
11	15.50	12.50
12	16.75	13.75
13	18.00	15.00
14	19.25	16.25
15	20.50	17.50
16	21.75	18.75

Recommended P.C.B Layout(Top Side)
P.C.B Thickness = 1.20mm
(Tolerance=±0.05)

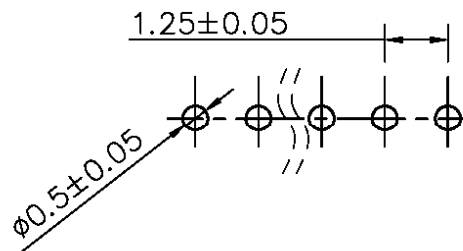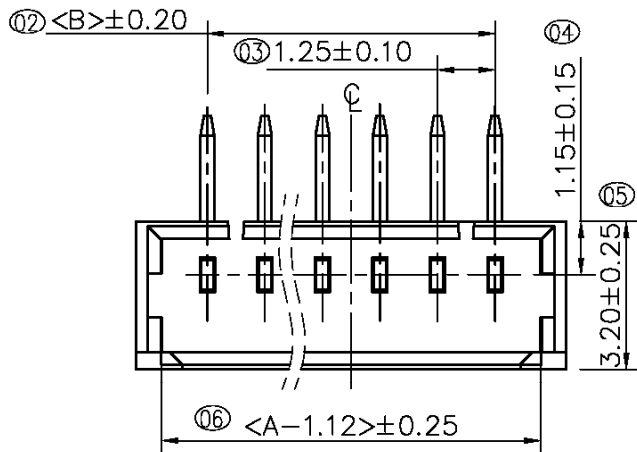

Current Rating: 1A AC,DC
Voltage Rating: 125V AC,DC
Temperature Range: -25°C~+85°C
Contact Resistance: 20mΩ max
Insulation Resistance: 500MΩ min
Withstanding Voltage: 500VAC/minute



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.25mm 90° DIP Type Wafer Connector	APP BY: <i>Hung</i>
0.000±0.1			CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C1204500XXX	A303