
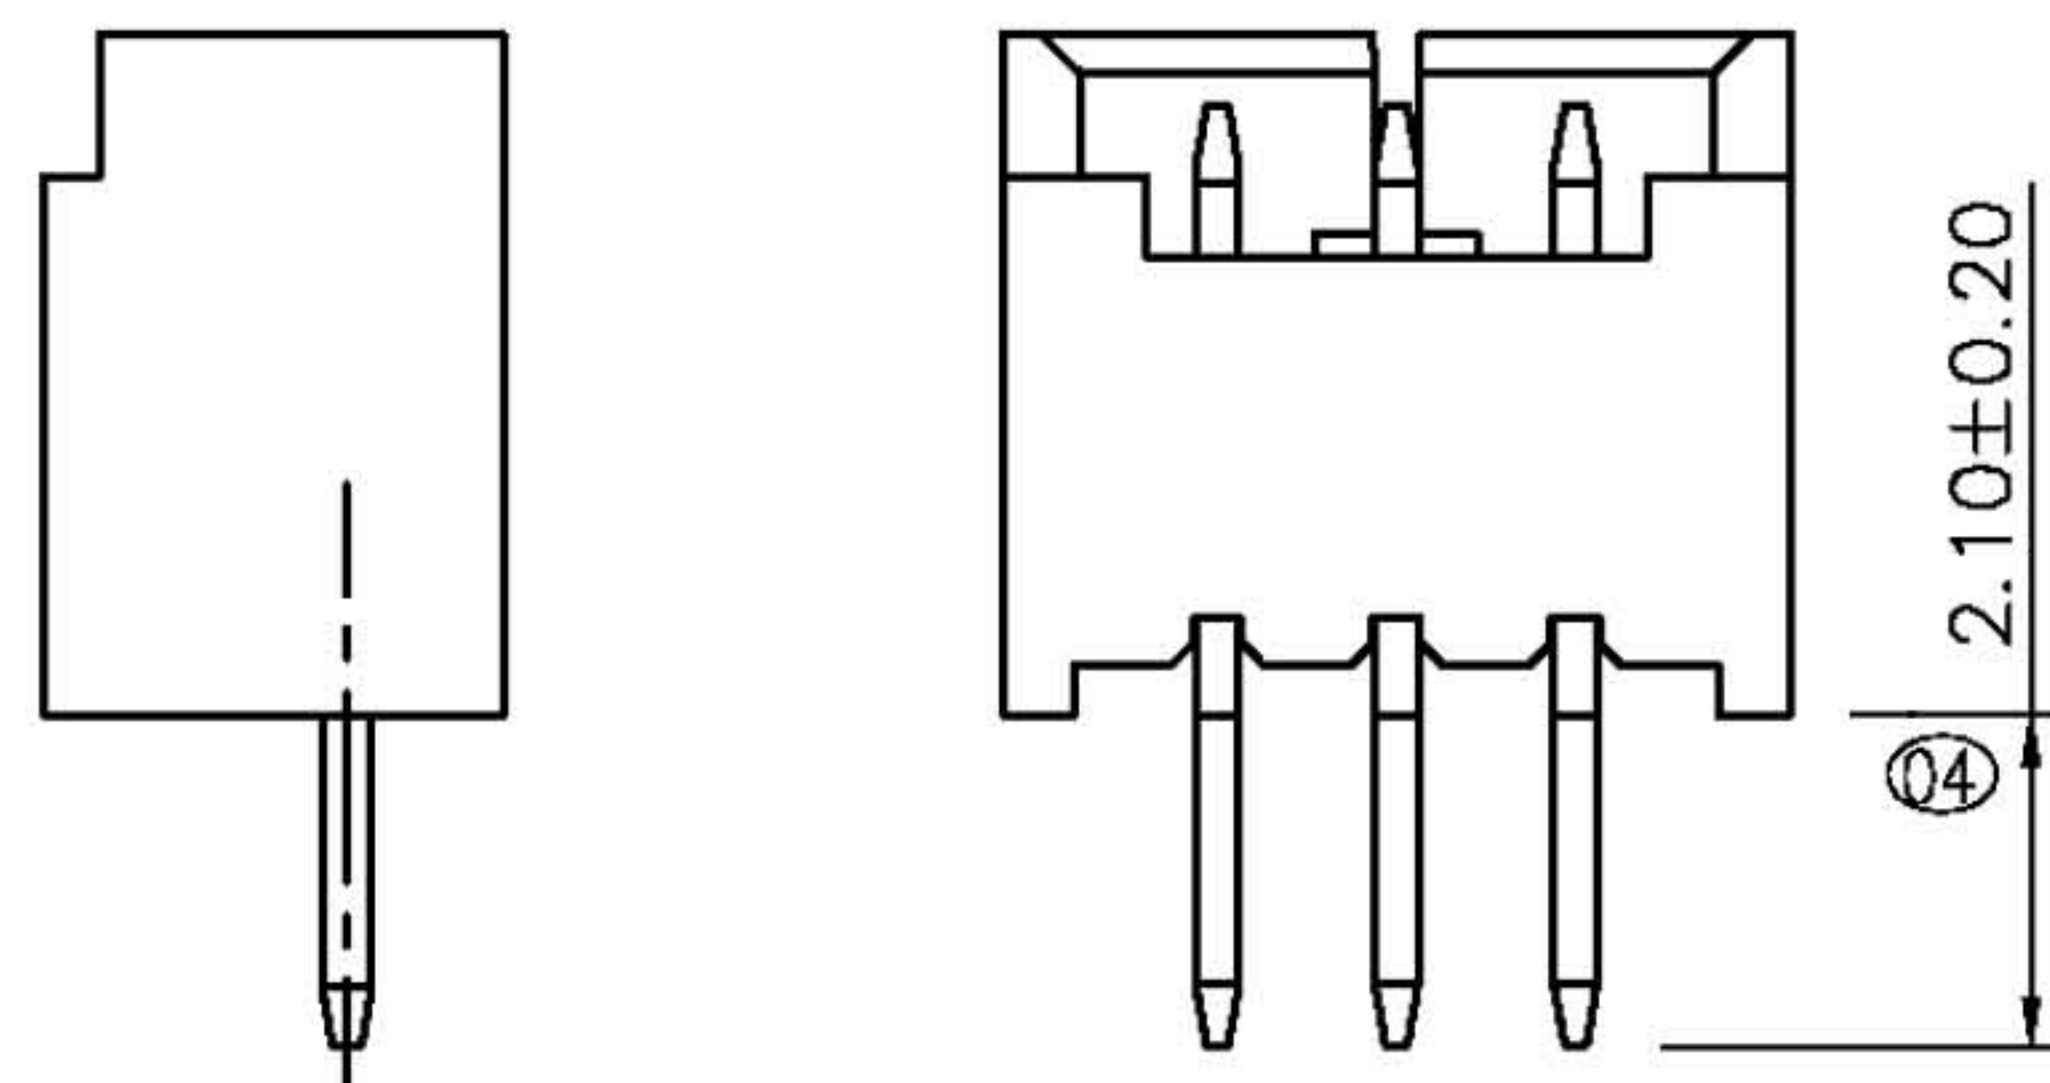


CUSTOMER COPY

| REV. | DESCRIPTION | APP. | DATE |
|------|-------------|------|------------|
| A | NEW DESIGN | Amos | 2010-03-24 |

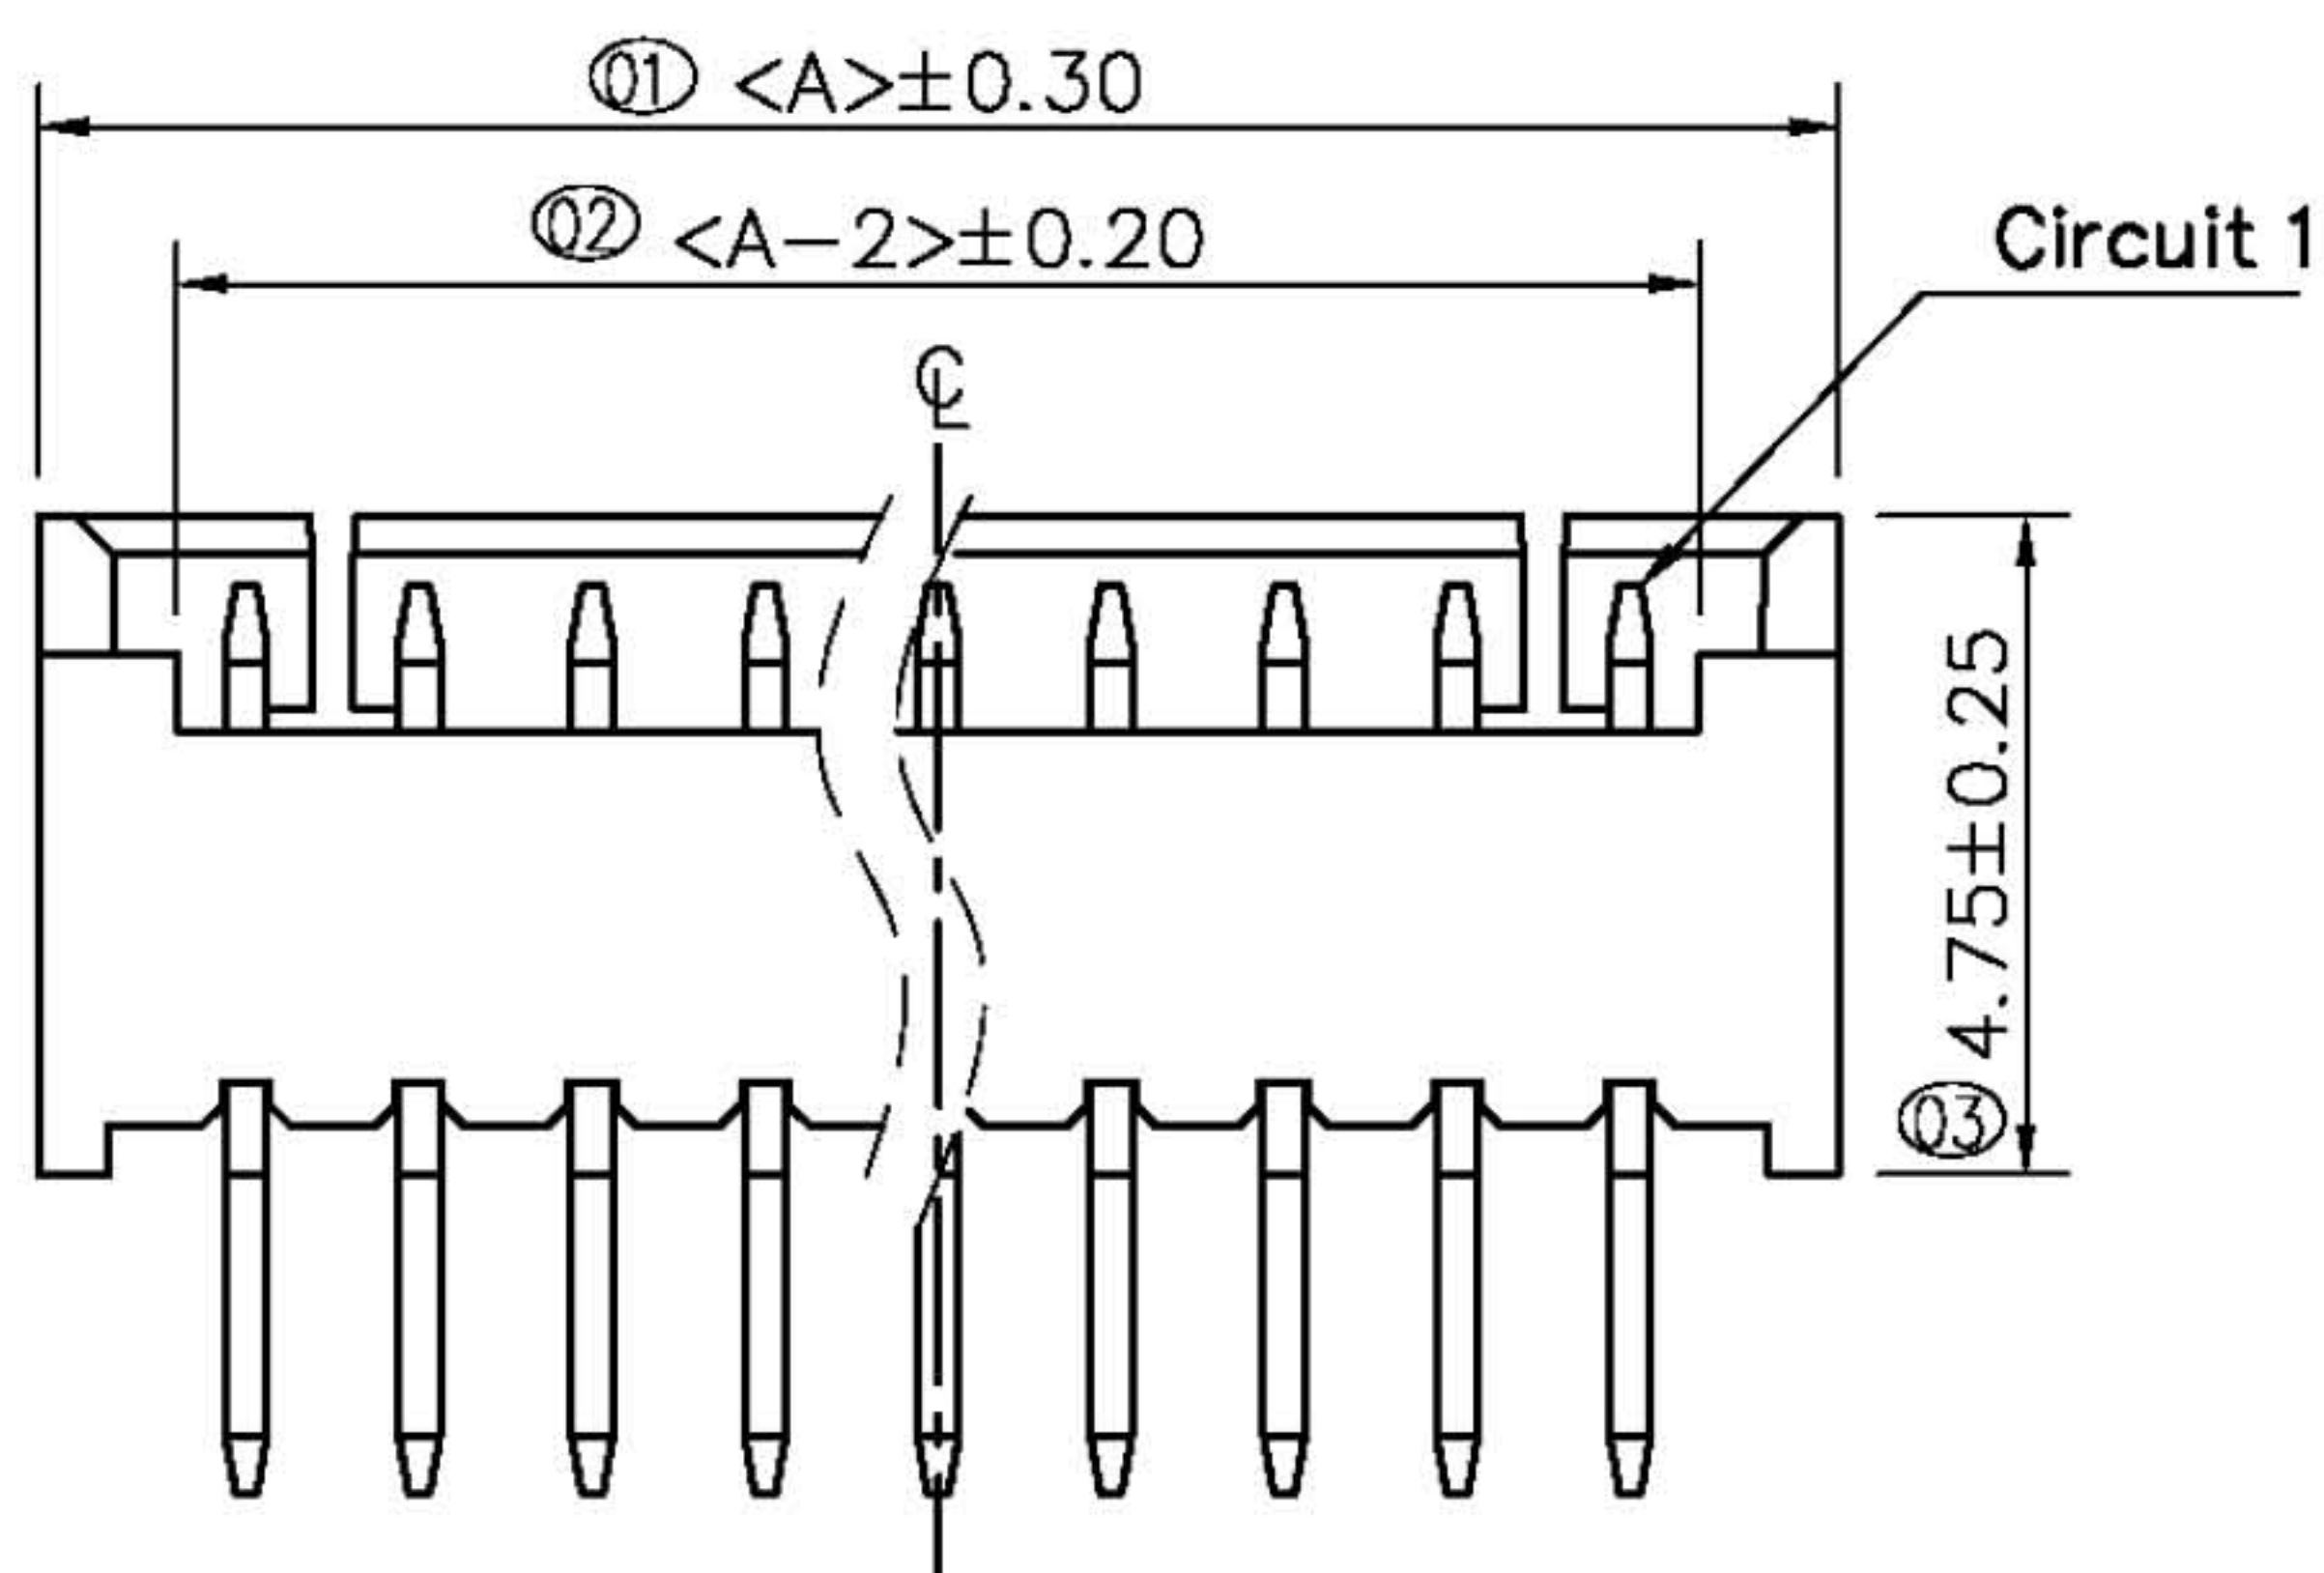


(2~3pin 的只有一个缺口在中间)
(如上图示)


ORDER INFORMATION

1204 5 10 XX X

- 1: Plating Tin
- No. of Contact
- 10: 180° DIP
- 5: 1250 Type

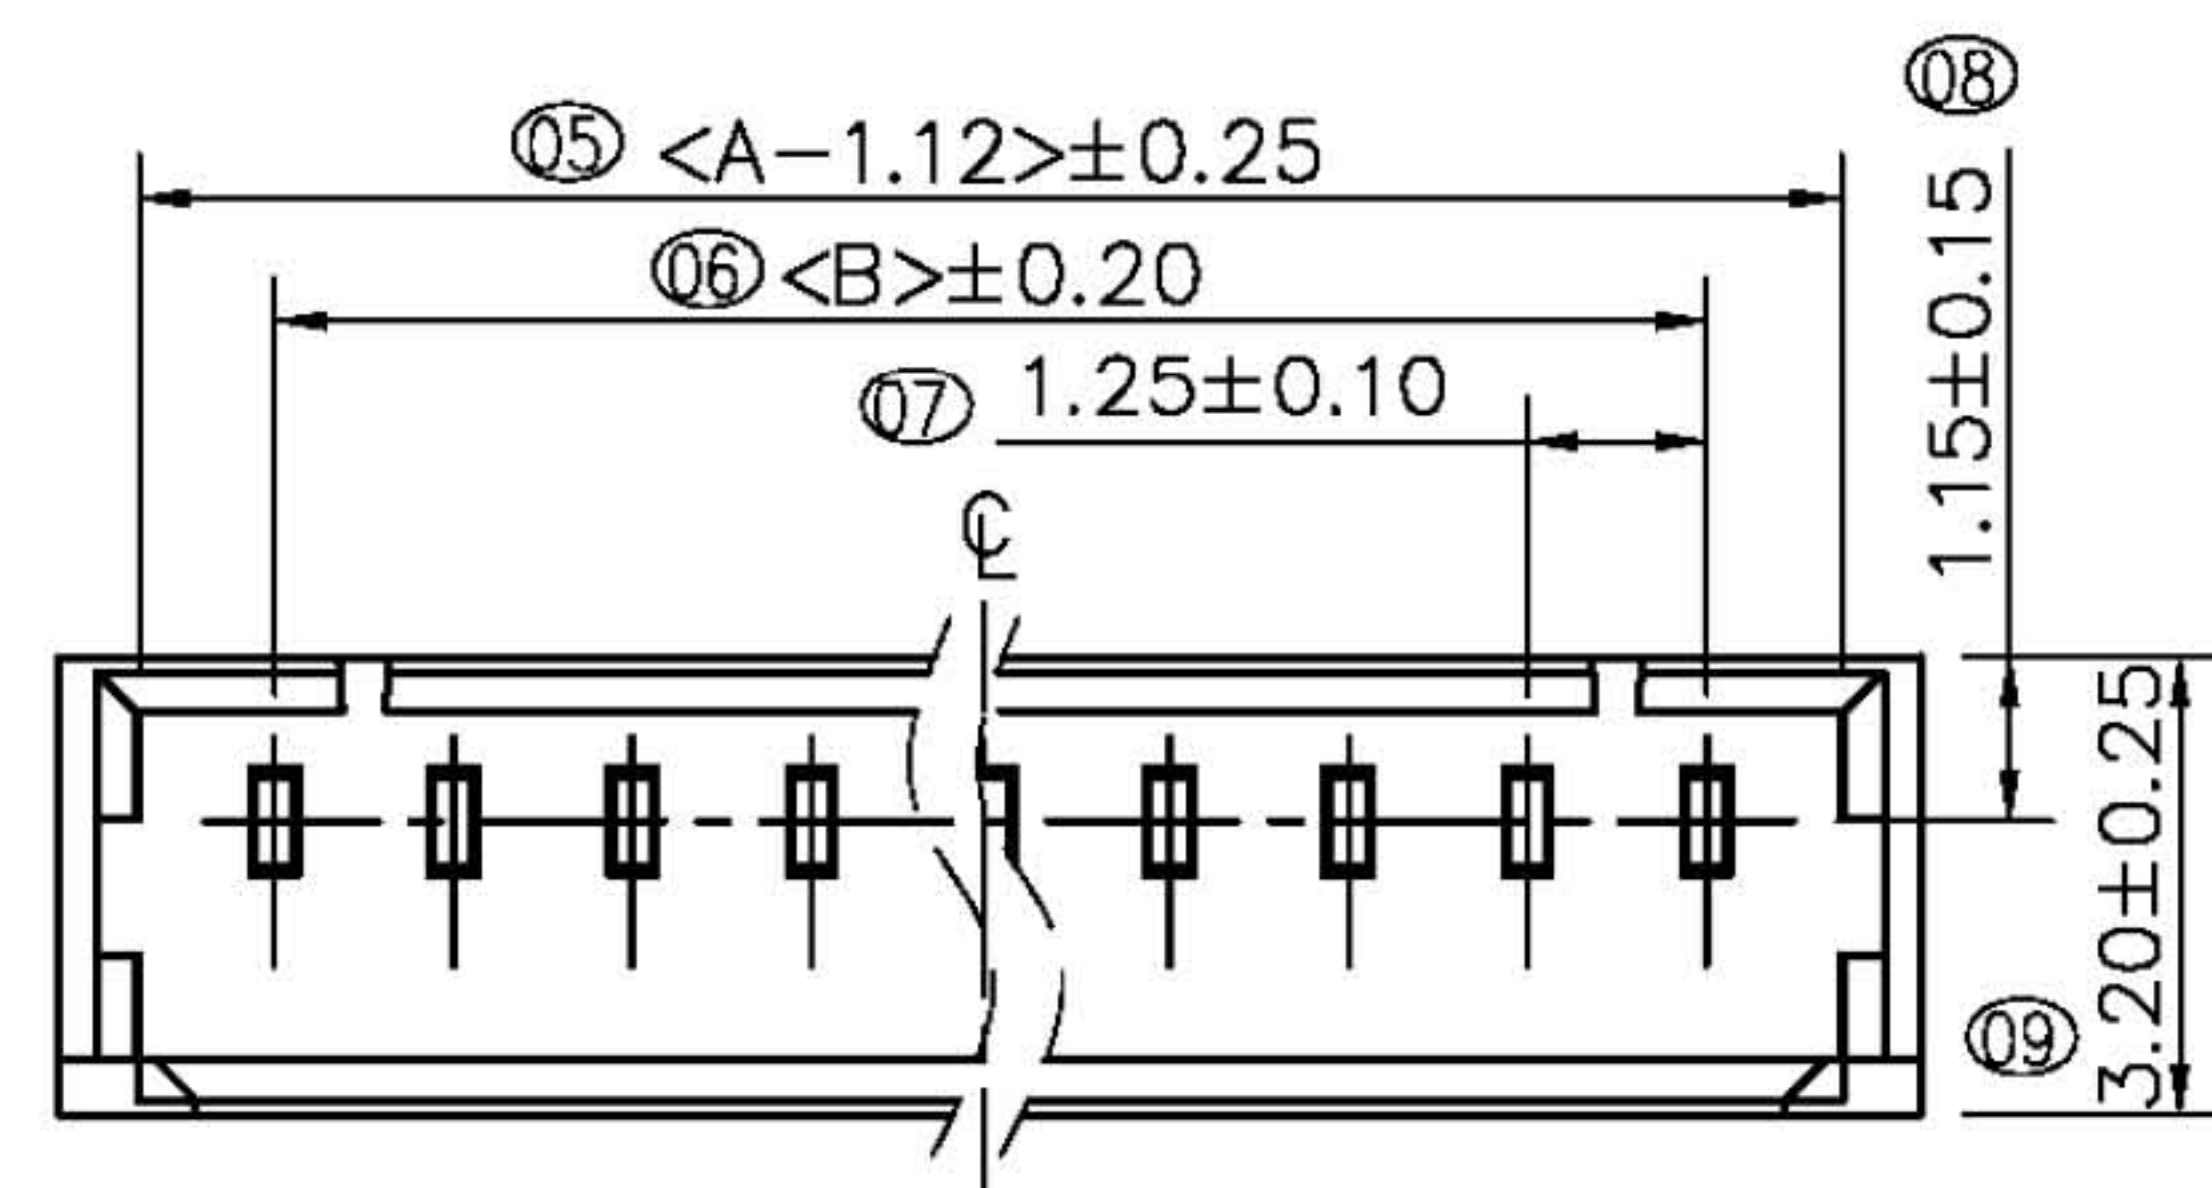

Recommended P.C.B Layout (Top Side)
(Tolerance = ±0.05)

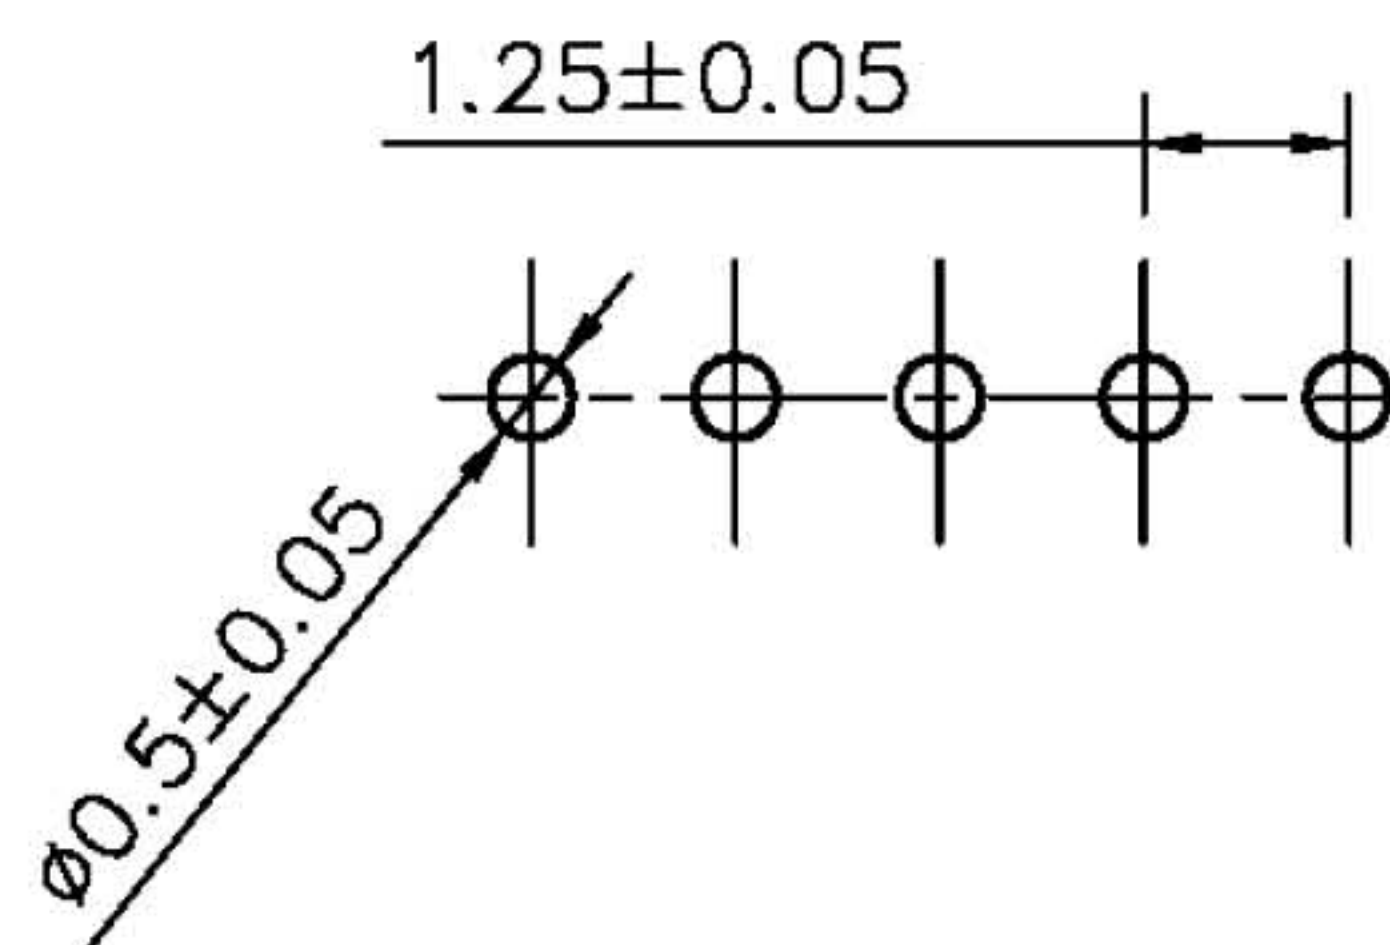

| NO. | Dimensions | |
|-----|------------|-------|
| | A | B |
| 02 | 4.25 | 1.25 |
| 03 | 5.50 | 2.50 |
| 04 | 6.75 | 3.75 |
| 05 | 8.00 | 5.00 |
| 06 | 9.25 | 6.25 |
| 07 | 10.50 | 7.50 |
| 08 | 11.75 | 8.75 |
| 09 | 13.00 | 10.00 |
| 10 | 14.25 | 11.25 |
| 11 | 15.50 | 12.50 |
| 12 | 16.75 | 13.75 |
| 13 | 18.00 | 15.00 |
| 14 | 19.25 | 16.25 |
| 15 | 20.50 | 17.50 |
| 16 | 21.75 | 18.75 |

NOTES:

- CURRENT RATING: 1A AC/DC
- VOLTAGE RATING: 125V AC/DC
- TEMPERATURE RANGE: -25°C~+85°C
- CONTACT RESISTANCE: 20mΩ MAX
- INSULATION RESISTANCE: 500MΩ MIN
- WITHSTANDING VOLTAGE: 500V AC/MINUTE



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595 FAX: 886-2-85124322

| | | | |
|-----------|------------|----------------------------|-----------------------|
| 0.0±0.30 | SCALE: 1:1 | TITLE: | PART NO: |
| 0.00±0.20 | UNIT: mm | Pitch 1.25mm 180° DIP Type | APP BY: <i>Hung</i> |
| 0.000±0.1 | | Wafer Connector | CHK BY: <i>Cheryl</i> |
| | | MATL: RoHS | DR BY: <i>Amos</i> |
| | | DWG. NO. C1204510XXX | A303 |