


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-02-22



ORDER INFORMATION

1212510 XX 1

No. of Contact

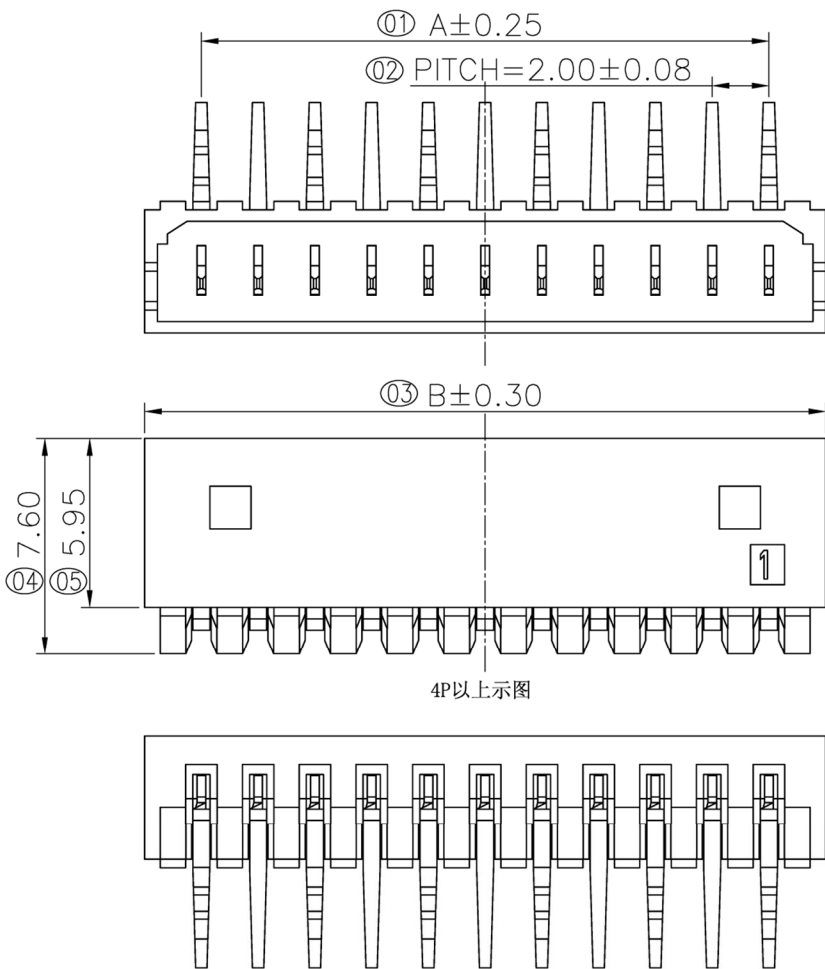

Recommended P.C.B Layout(Top Side)

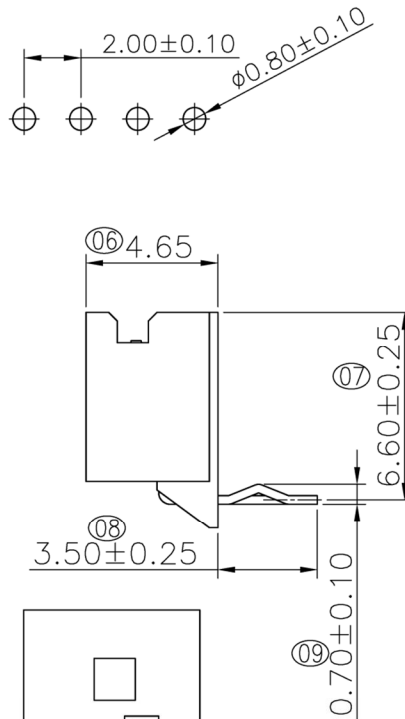

NO.	DIMENSION	
	A	B
02	2.00	6.00
03	4.00	8.00
04	6.00	10.00
05	8.00	12.00
06	10.00	14.00
07	12.00	16.00
08	14.00	18.00
09	16.00	20.00
10	18.00	22.00
11	20.00	24.00
12	22.00	26.00
13	24.00	28.00
14	26.00	30.00
15	28.00	32.00

NOTES:

CURRENT RATING: 2A AC/DC.
 VOLTAGE RATING: 125V AC/DC.
 TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$.
 CONTACT RESISTANCE: 20mΩ MAX.
 INSULATION RESISTANCE: 1000MΩ MIN.
 WITHSTANDING VOLTAGE: 800V AC/MINUTE.

MX2.00单排 90° WAFER塑胶	PA66+15%G.F	米黄色
MX2.00单排长PIN端子	C2680	外露3.50mm
零件名称	材料	规格



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	MX 2.0mm 90° Single Row Type Wafer Connector	APP BY: Hung
0.000±0.1			CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1212510XX1	A303

