
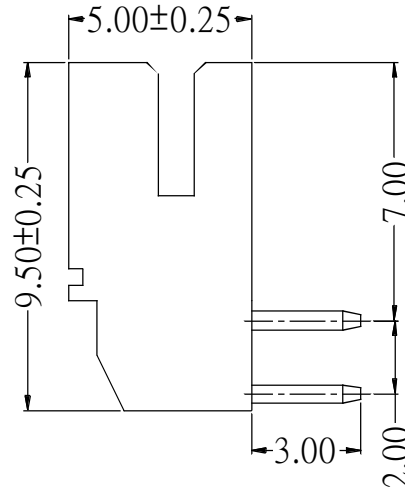
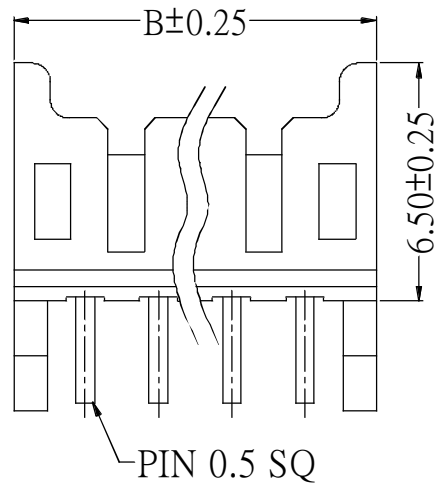


CUSTOMER COPY

REV	ECN NO.	APP.	DATE
A	NEW DESIGN		2015/7/9

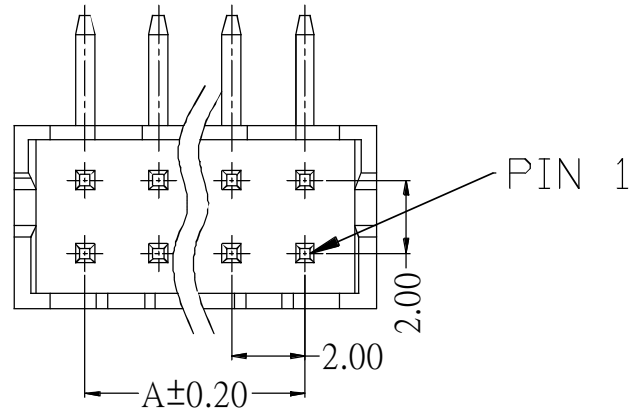

ORDER INFORMATION

1222 1 1 1 XX 1

Plating:
1: Tin


No. Of Contact

Color
1: Beige

Style
1: R/A

Type
1: Jst (ROHS)

CIRCUITS	Dim A	Dim B
04	2.00	5.90
06	4.00	7.90
08	6.00	9.90
10	8.00	11.90
12	10.00	13.90
14	12.00	15.90
16	14.00	17.90
18	16.00	19.90
20	18.00	21.90
22	20.00	23.90
24	22.00	25.90
26	24.00	27.90
28	26.00	29.90
30	28.00	31.90
32	30.00	33.90
34	32.00	35.90
40	38.00	41.90

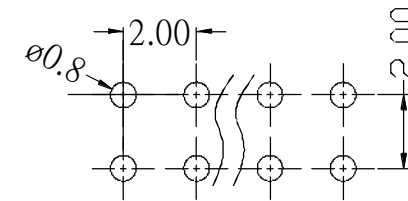

P.C.B. LAYOUT

NOTE:

Available: 4~40pins
 Insulator: Nylon UL 94V-0
 Conductor: Brass/Tin plated

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL:886-85124595 FAX:886-85124322			
0.0±0.35	SCALE: UNIT:mm	TITLE: 2.00mm Pitch Wafer 90度 DIP	PART NO:
0.00±0.25			APP BY:CHERYL
0.000±0.10			CHK BY:MIAO
 		MATL: DWG. NO. 1222111XX1	DR BY:ADER A030