


CUSTOMER COPY

ORDER INFORMATION

1232 0 6 0 XX X

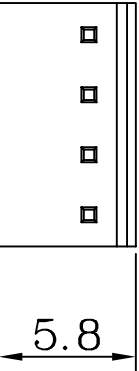

0.64


2.54

∞

Plating:
1: Tin
2: Ni 50u"/Tin 100u"

No. Of Contact

Type
6: 180°

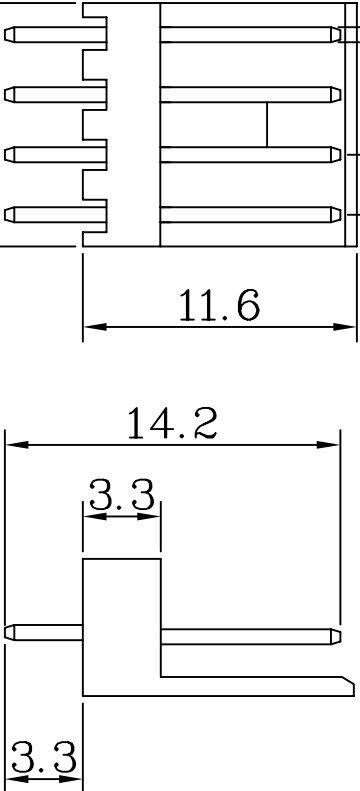

11.6

14.2


φ1.27

SPECIFICATION

MATERIAL

2.54*(No. of Contacts-1)±0.25
2.54*(No. of Contacts-1)+2*1.34±0.30

- * Current Rating: 3 A
- * Withstanding Voltage: 600 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 20 Milliohms MAX.
- * Operating Temperature: -40°C to +85°C
- * Retention Force: 700g MIN.
- * Contact: Bass , 0.64mm Square post
- * Insulator: NYLON 66
- * Plating: Tin

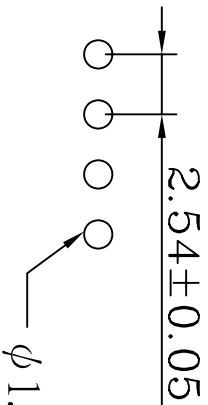


2.54±0.05

φ1.2±0.05

Recommended P.C. Board Hole Layout

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

		ACMELUX CO., LTD. TEL:886-85124595 FAX:886-85124322	
0.04±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	Pitch 2.54mm (.100")	APP BY: Hung
0.000±		∠4P 180° Water	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1232060XXXX	