
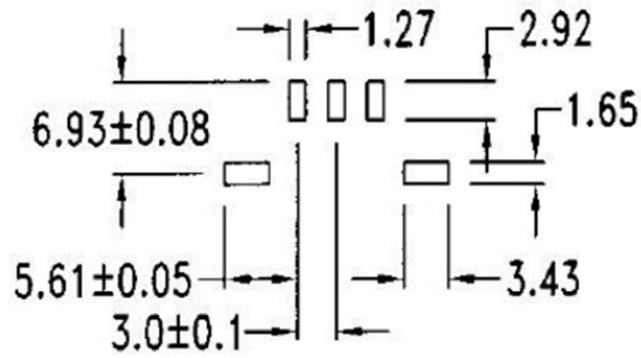
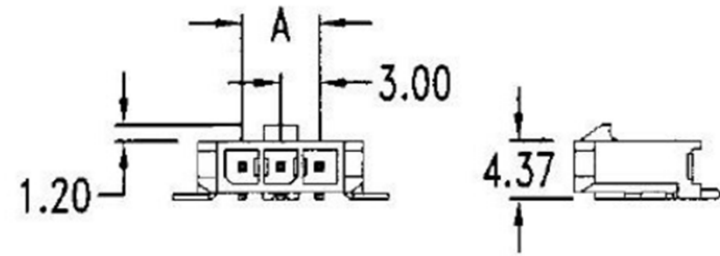


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-09-01

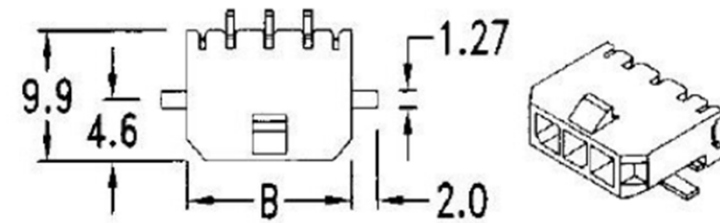

PCB Layout: Component side

ORDER INFORMATION

1235 12 X XX X

- 1:Plating Tin
- No. of Contact
- 0:Tube
- 1:Reel
- SMT Type

Features:

- 2 ~ 12 circuits available
- Material: Nylon 46 / 6T
- Tin-plated brass pin
- Mates with 30002HM-N housing


Specification:



- Current rating: 5A AC, DC
- Voltage rating: 250V AC, DC
- Contact resistance: 10mΩ Max.
- Dielectric withstanding voltage: 1500V AC/minute
- Ambient temperature range: -25°C ~ 85°C



Dimensional Information

Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B	Circuits	Dim. A	Dim. B
2	3.0	9.65	4	9.0	15.65	6	15.0	21.65	8	21.0	27.65	10	27.0	33.65	12	33.0	39.65
3	6.0	12.65	5	12.0	18.65	7	18.0	24.65	9	24.0	30.65	11	30.0	36.65			


鈺滿榮企業股份有限公司 ACMELUX CO., LTD.
 TEL:886-2-85124595 FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: Pitch 3.0mm SMT Right Angle Type Header Connector	PART NO:
0.00±0.20	UNIT: mm		APP BY: Hung
0.000±0.1			CHK BY: Cheryl
 		MATL: RoHS	DR BY: Amos
DWG. NO. C123512XXXX			A303