
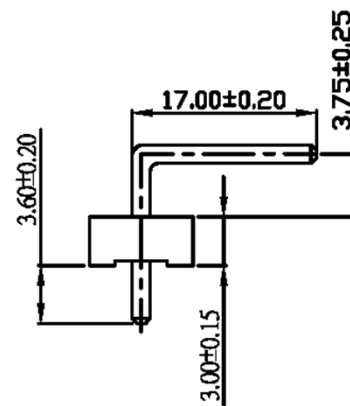


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2013-01-16

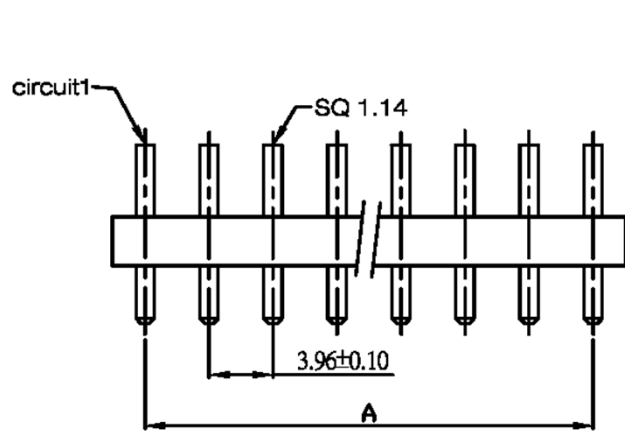



ORDER INFORMATION

1241 2 1 3 XX X

- 1: Plating Tin
- No. of Contact
- 90°
- Type

Dimensions

circuit	A	B	circuit	A	B
		3.96	11	39.60	43.56
2	3.96	7.92	12	43.56	47.52
3	7.92	11.88	13	47.52	51.48
4	11.88	15.84	14	51.48	55.44
5	15.84	19.80	15	55.44	59.40
6	19.80	23.76	16	59.40	63.36
7	23.76	27.72	17	63.36	67.32
8	27.72	31.68	18	67.32	71.28
9	31.68	35.64	19	71.28	75.24
10	35.64	39.60	20	75.24	79.20

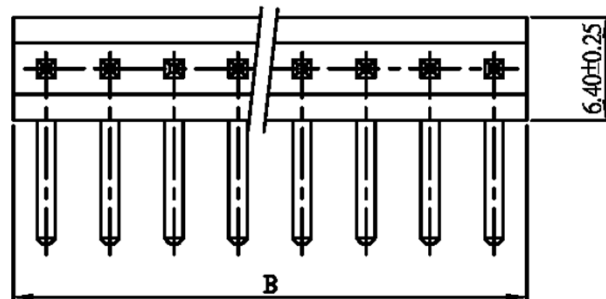

P.C.B. LAYOUT

Material: pin: Brass Tin-Plated
 Base: Nylon66 UL94-V2
 Circuits: 2-20circuits available
 Insulation Resistance: 1000MΩ min
 Withstand Voltage: 1500V AC/minute
 Current Rating: 7A AC/DC
 Voltage Rating: 250V AC/DC



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595

FAX: 886-2-85124322

0.0±0.50	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	MX3.96mm 90° 無靠背 DIP Type	APP BY: <i>Hung</i>
0.000±0.1		Wafer Connector	CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C1241213XXX	