


CUSTOMER COPY




REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-07-16

ORDER INFORMATION

1241 4 1 0 XX X

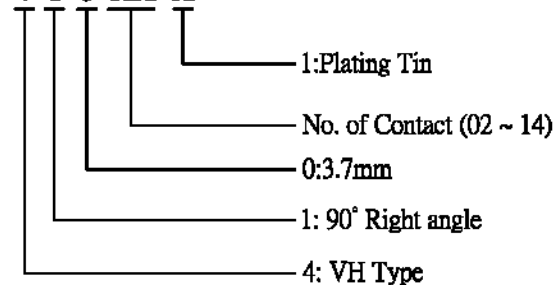

Poles	Dimension mm (in.)		Part No.
	A	B	
2	3.96 (0.156)	7.92 (0.312)	7.92 (0.312)
3	7.92 (0.312)	11.92 (0.469)	11.92 (0.469)
4	11.88 (0.468)	15.84 (0.624)	15.84 (0.624)
5	15.84 (0.624)	19.84 (0.781)	19.84 (0.781)
6	19.80 (0.780)	23.80 (0.937)	23.80 (0.937)
7	23.76 (0.935)	27.88 (1.098)	27.88 (1.098)
8	27.72 (1.074)	31.74 (1.250)	31.74 (1.250)
9	31.68 (1.247)	35.86 (1.412)	35.86 (1.412)
10	35.64 (1.403)	39.90 (1.571)	39.90 (1.571)
11	39.60 (1.559)	43.84 (1.726)	43.84 (1.726)
12	43.56 (1.715)	47.92 (1.887)	47.92 (1.887)
13	47.52 (1.871)	51.72 (2.036)	51.72 (2.036)
14	51.48 (2.027)	55.92 (2.202)	55.92 (2.202)

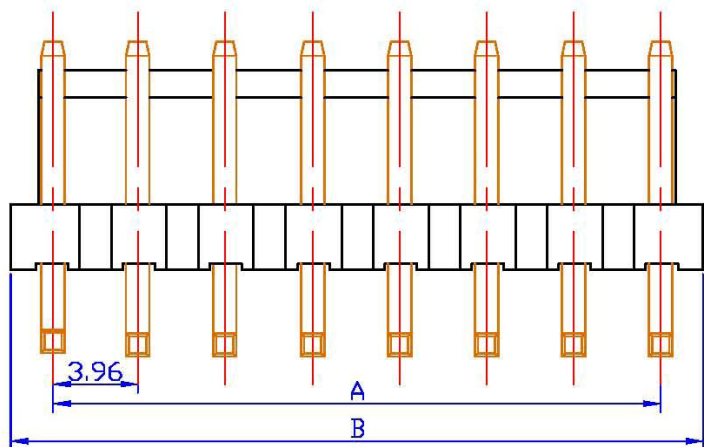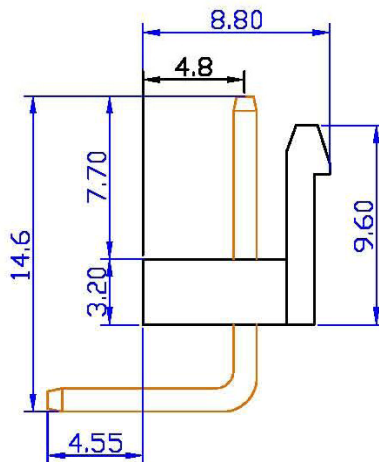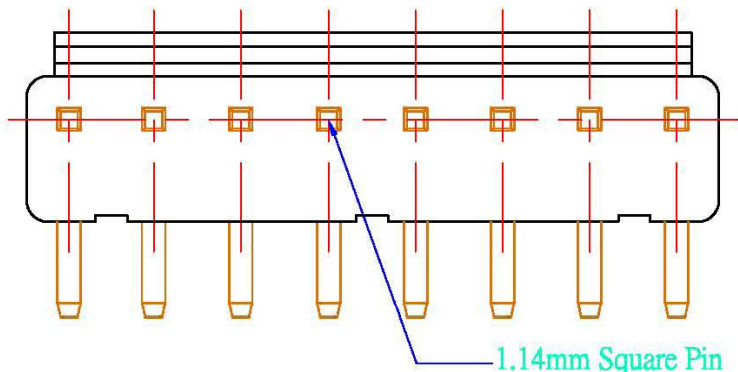

Specifications

- Current Rating: 5A AC, DC
- Voltage Rating: 250V AC Maximum
- Operating Temp: -25°C ~ +85°C
- Contact Resistance: 10mΩ Max
- Insulation Resistance: 1000mΩ Min
- Dielectric Withstanding Voltage: 1500V AC,DC Min
- Terminal Material: Brass/Tin-plated
- Plating: Tin or Gold plated
- Material: Nylon 66, UL94V-0
- Color: White or Natural

RECOMMENDED P.C.BOARD HOLE DIMM.



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.50	Scale: 1:1	Title: Pitch 3.96mm (156") 90° DIP VH Type Wafer Connector	PART NO:
0.00±0.25	Unit: mm		APP BY: Hung
0.000±			CHK BY: Cheryl
		Material: RoHS	DR BY: Amos
		DWG. NO. C1241410XXX	A303