



CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2009-06-02



RoHS

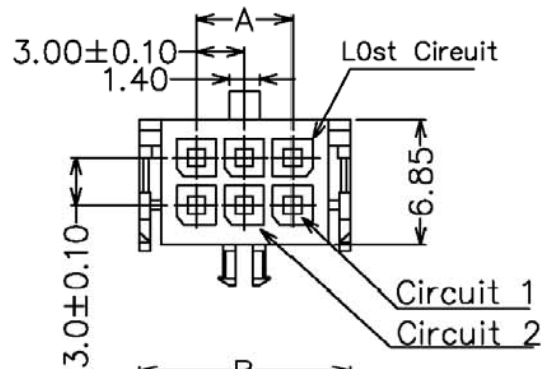

0.64*0.64±0.05


Dimensions

PART NO	Dimensions	
	A	B
2X1P	—	6.80
2X2P	3.00	9.80
2X3P	6.00	12.80
2X4P	9.00	15.80
2X5P	12.00	18.80
2X6P	15.00	21.80
2X7P	18.00	24.80
2X8P	21.00	27.80
2X9P	24.00	30.80
2X10P	27.00	33.80
2X11P	30.00	36.80
2X12P	33.00	39.80

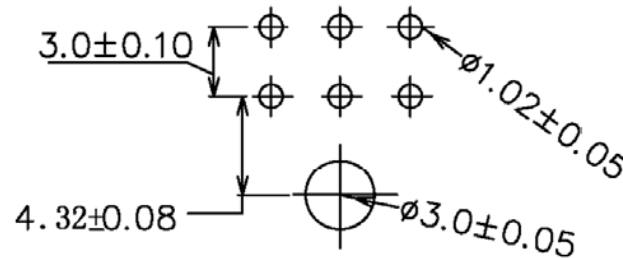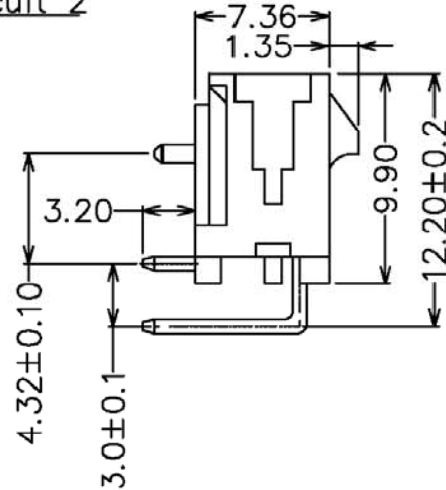

ORDER INFORMATION

1245 0 1 0 XX 1

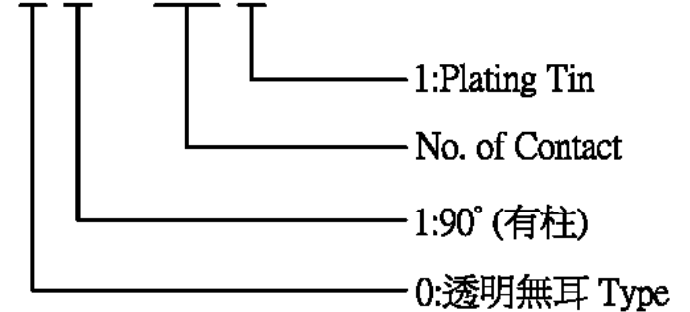

MATERIAL

WAFER: NYLON 46 or HTN UL 94V-0

CONTACTS: BRASS

PLATING: TIN OVER NICKEL

SPECIFICATION

Current Rating: 1A AC, DC

Voltage Rating: 50V AC, DC

OPERATING TEMPERATURE: -25° C ~ +85° C

Contact Resistance: 20mΩ Max

Insulation Resistance: 100MΩ Min

Withstanding Voltage: 500V AC/minute



鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.35	SCALE: 1:1	TITLE:	PART NO:
0.00±0.25	UNIT: mm	DIP 90° Type MX3.0mm Wafer Connector	APP BY: <i>Hung</i>
0.000±0.15			CHK BY: <i>Cheryl</i>
MATERIAL: RoHS		DWG. NO. C1245010XX1	DR BY: <i>Amos</i> A303