

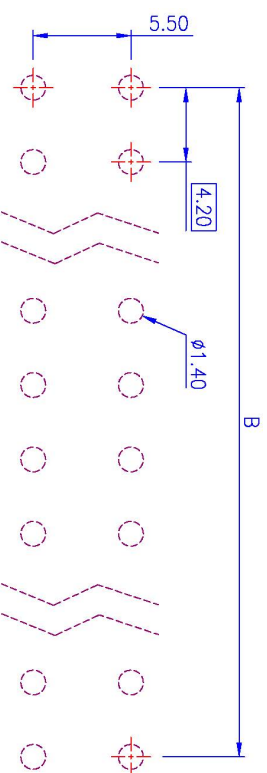
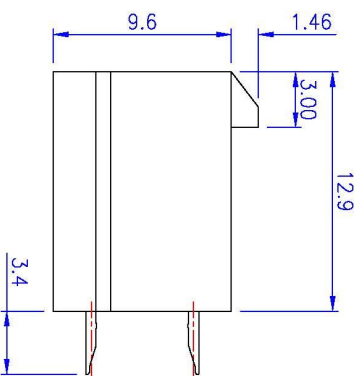
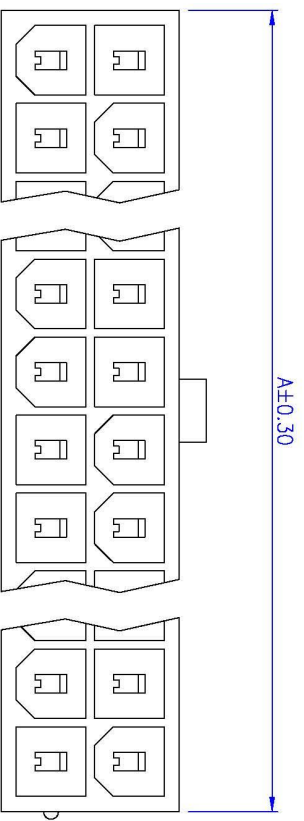


CUSTOMER COPY

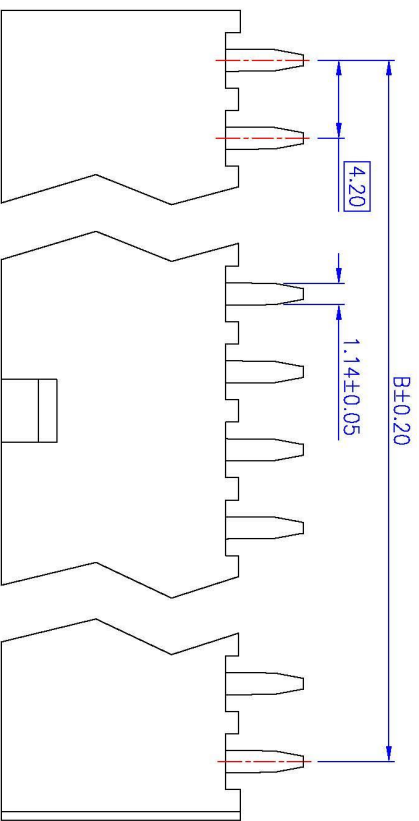

PCB Layout  
(Top View)

ORDER INFORMATION  
1246 3 0 0 XX X

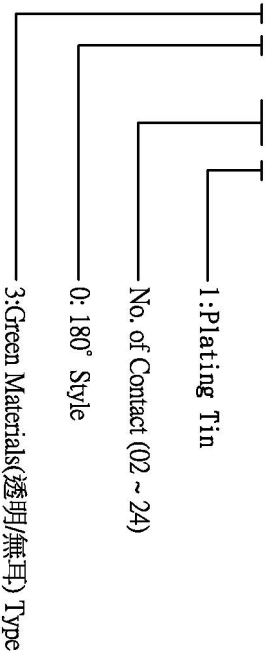

Pos.	Dimension	
	A	B
02	5.40	4.20
04	9.60	4.20
06	13.80	8.40
08	18.00	12.60
10	22.20	16.80
12	26.40	21.00
14	30.60	25.20
16	34.80	29.40
18	39.00	33.60
20	43.40	37.80
22	47.40	42.00
24	51.60	46.20

Material and Finish

- Housing: Nylon 66 (UL94V-2).
- Terminal: Brass.

Electrical Characteristics

- Current Rating: 7.0 Amp. Max.
- Dielectric Withstand Voltage: 1000V AC RMS for 60Seconds.
- Insulation Resistance: 1000M Ohms Min. at 1000V DC.

Mechanical Characteristics

- Operating Temperature: -25°C ~ +85°C



钰满荣企业股份有限公司 ACME LUX CO., LTD.  
TEL.:886-2-85124595 FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 4.2mm Mini-Fit PCB Mount	APP BY: <b>Hungl</b>
0.000±0.1		Vertical Without Post Power Conn.	CHK BY: <b>Cheryl</b>



MATL: RoHS	DR BY: <b>Amos</b>
DWG. NO. TR-3272	

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2014-05-15