

CUSTOMER COPY




ORDER INFORMATION

171 32 XX XX X

Plating:
 2: Selective Gold
 3: All Gold
 6: Gold 10u"


Type _____
 Pin Chart _____
 No. Of Contact (004 ~ 100)

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN		

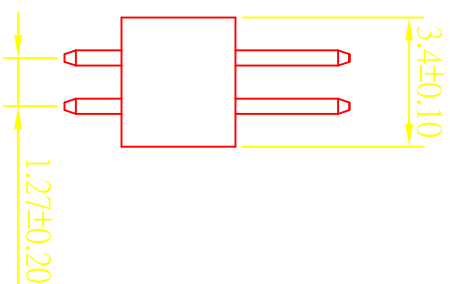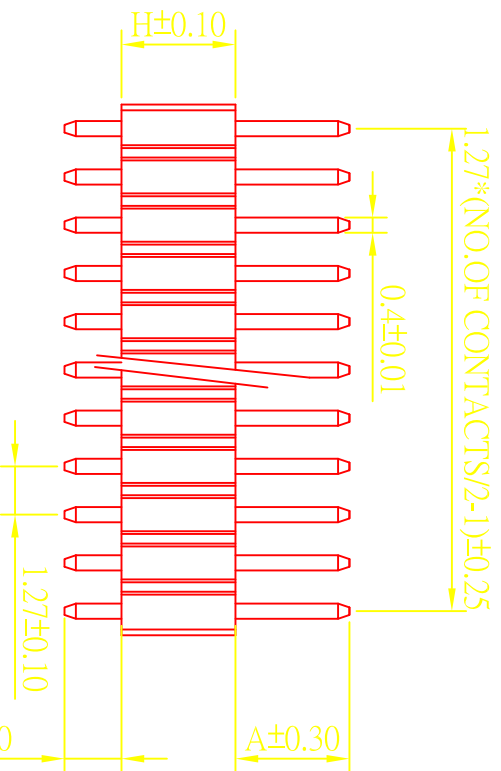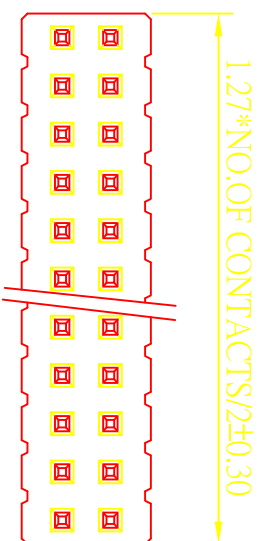

Pin Chart

No.	A	B	H	No.	A	B	H	No.	A	B	H
00	3.00	2.20	1.50	10	3.80	1.50	1.00	20	4.00	2.40	1.50
01	3.00	2.30	2.00	11	4.00	2.10	1.00	21	6.50	3.00	2.00
02	2.00	2.00	3.00	12	5.00	2.00	1.00	22	8.00	3.00	2.00
03	3.50	1.80	1.00	13	4.00	2.40	1.00	23	2.80	2.60	1.50
04	3.00	2.20	1.00	14	4.00	0.80	0.80	24	4.00	3.00	2.50
05	4.00	1.50	1.50	15	3.00	2.60	2.50				
06	3.00	2.60	1.50	16	8.00	1.50	2.00				
07	2.00	2.00	1.00	17	2.50	2.50	2.50				
08	3.00	2.00	1.50	18	3.00	2.30	1.50				
09	3.40	1.50	1.50	19	2.00	2.00	1.50				

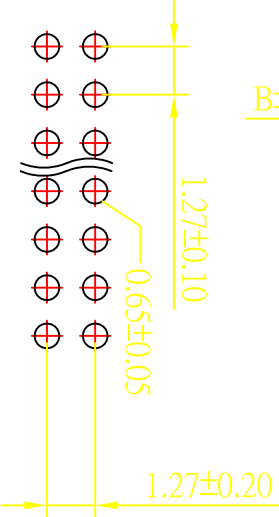

Recommended P.C. Board
 Hole Layout

SPECIFICATION

- * Current Rating: 1 A
- * Withstanding Voltage: 600 VAC (1 min.)
- * Insulation Resistance: 1000 Megohms MIN.
- * Contact Resistance: 30 Milliohms MAX.
- * Operating Temperature: -55°C to +105°C
- * Retention Force: 450g MIN.

MATERIAL


- * Contact: Phosphor Bronze 0.40mm square post
- * Insulator: High temperature plastic
- * Plating: Gold



TEL:886-2-85124595 FAX:886-2-85124322

鈺滿榮企業股份有限公司 ACME LUX CO., LTD.

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.27mm*1.27mm Dual Row Pin Header Connector	107500
0.000±0.1			APP BY: Hung



MATL: RoHS (Nylon 6T)
 DR BY: Amos
 DWG. NO. C17132XXXXXX

