

CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2012-05-14

ORDER INFORMATION




171 36 35 XX X

2:Plating Selective Gold  
3:Plating Gold Flash

No. of Contact

H=1.0mm 1.9/2.0/5.1

雙排單塑 SMT Type

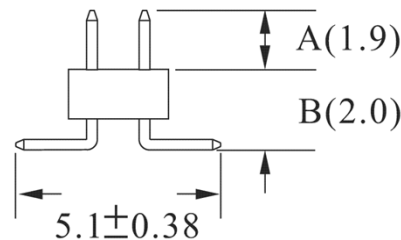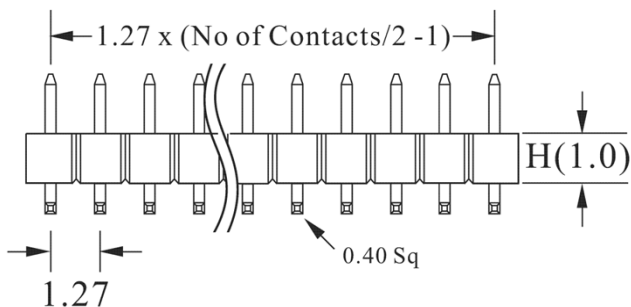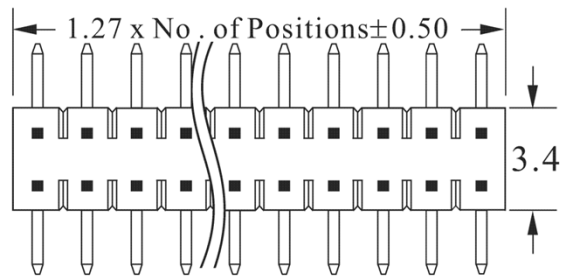

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V


Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

Recommended P.C.Board Hole Layout :

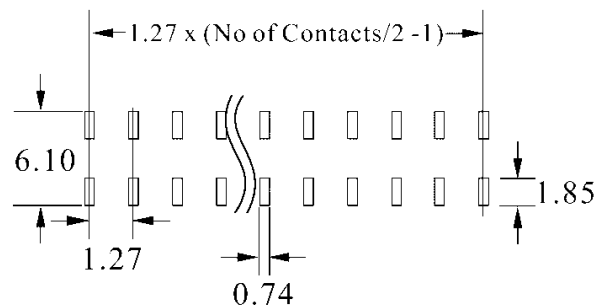

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.38	SCALE: 1:1	TITLE: Pitch 1.27mm 雙排單塑SMT Type Pin Header Connector	PART NO:
0.00±0.25	UNIT: mm		APP BY: <i>Hung</i>
0.000±0.15			CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C1713635XXX	A225