


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2013-02-19

ORDER INFORMATION

171 36 XX XX X


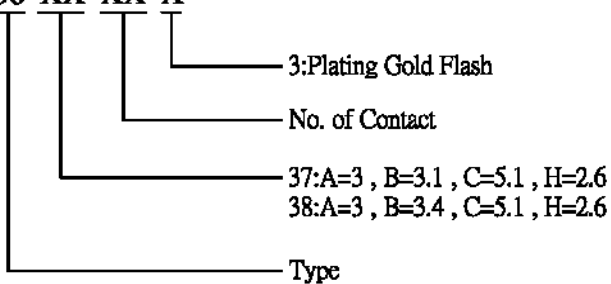


SPECIFICATIONS


- Current Rating : 1 Amps
- Insulator resistance : 5000 Megohms
- Dielectric withstanding : AC 500V
- Operating Temperature : -40 °C ~ +105 °C

MATERIAL :

- Housing : High Temperature Thermoplastic
- Terminal : Brass

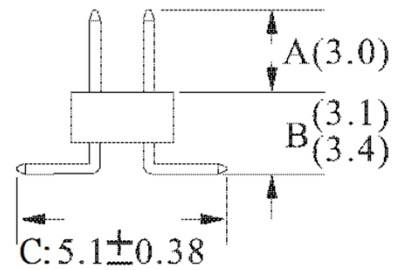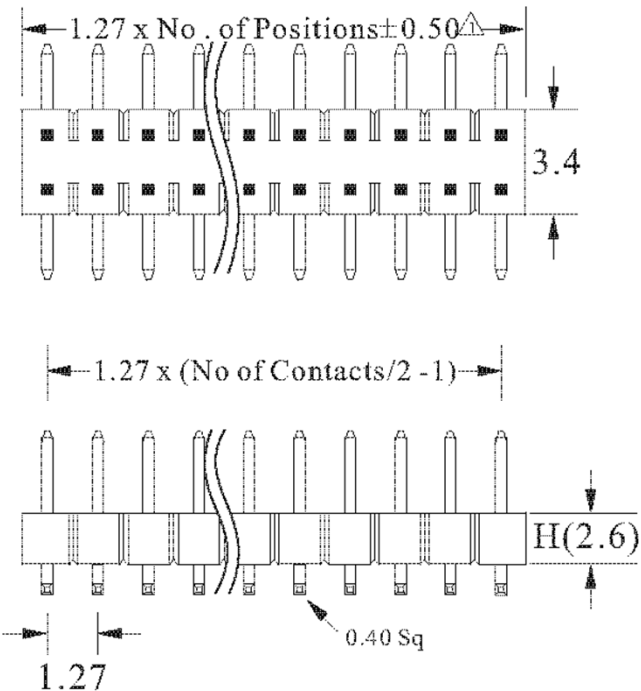

Recommended P.C.Board Hole Layout :

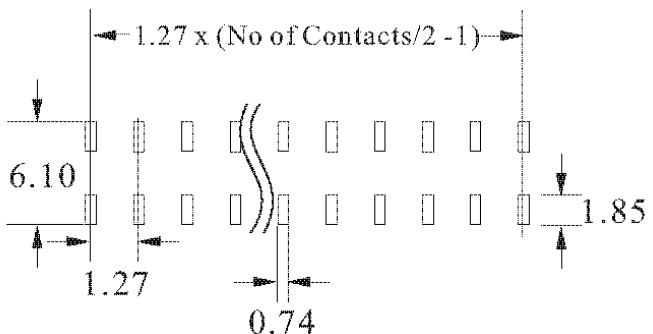

鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL:886-2-85124595 FAX:886-2-85124322			
0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.27mm SMT Dual Rows	APP BY: <i>Hung</i>
0.000±0.15		Type Pin Header Connector	CHK BY: <i>Cheryl</i>
		MATL: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C17136XXXXXX	A223