

CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Ader	20141021

*Order Information




171 38 11 XX X

3:Gold Flash

No. Of Contact

H:2.6 3.1/3.2/5.3 Reel

雙排 SMT + CAP

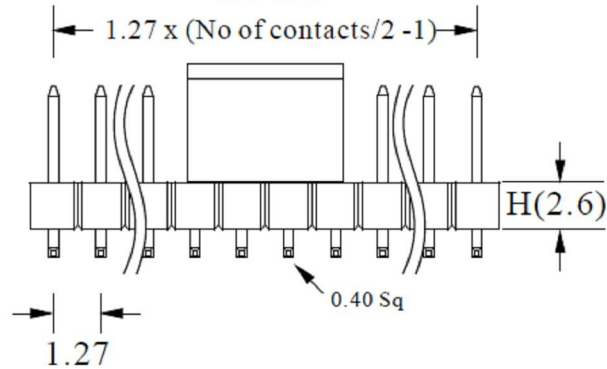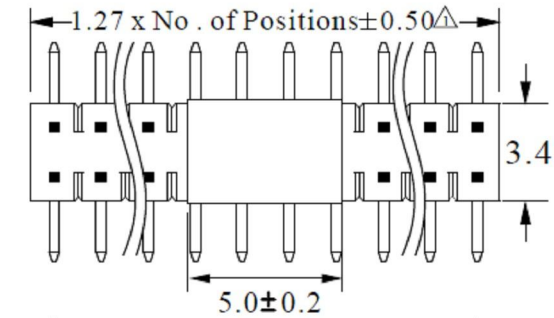

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms

Dielectric withstanding : AC 500V


Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

Recommended P.C.Board Hole Layout :

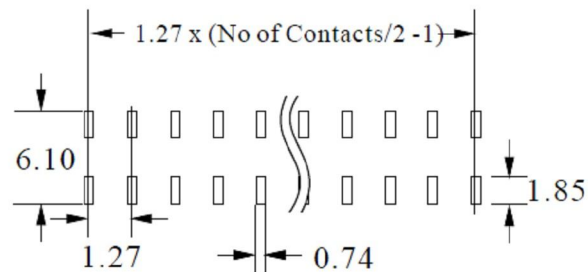

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL:886-2-85124595 FAX:886-2-85124322		PART NO:	
		APP BY: Hung	
MATERIAL: RoHS		CHK BY: Cheryl	
DWG. NO. 1713811XXX		DR BY: Ader	

0.0±0.30	SCALE:
0.00±0.20	UNIT: mm
0.000±0.1	

