



CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-03-03

ORDER INFORMATION

171 40 07 XX X

- 3:Plating Gold Flash
- No. of Contact (04 ~ 100)
00:100 Pin
- H=1.0 3/1.5/5.2
- Type

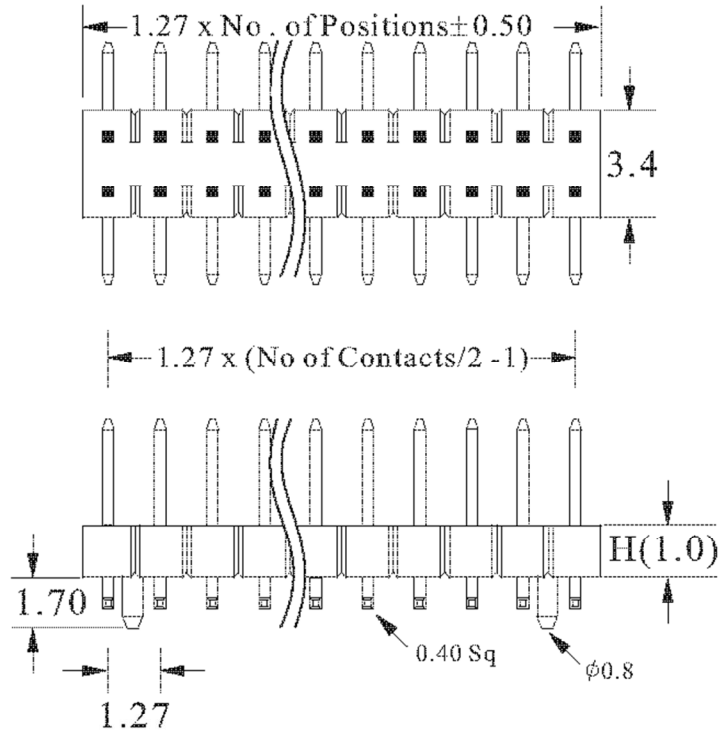


SPECIFICATIONS



- Current Rating : 1 Amps
- Insulator resistance : 5000 Megohms
- Dielectric withstanding : AC 500V
- Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MATERIAL :

- Housing : High Temperature Thermoplastic
- Terminal : Brass

Recommended P.C.Board Hole Layout :

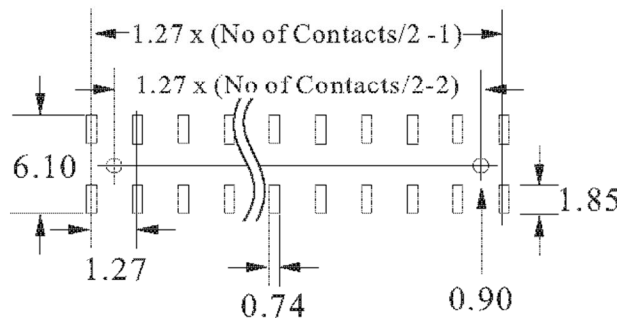

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL:886-2-85124595 FAX:886-2-85124322			
0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.27mm*1.27mm SMD	APP BY: Hung
0.000±0.15		Dual Row Type Pin Header	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1714007XXX	A225