
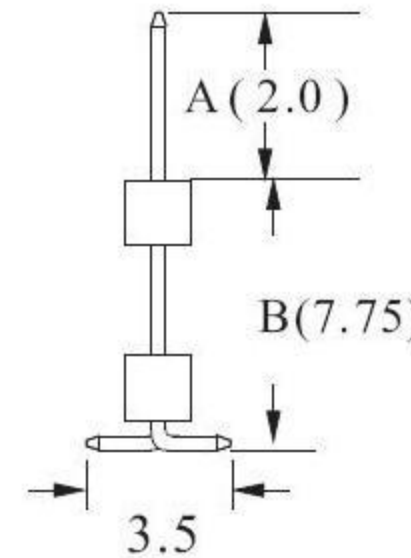
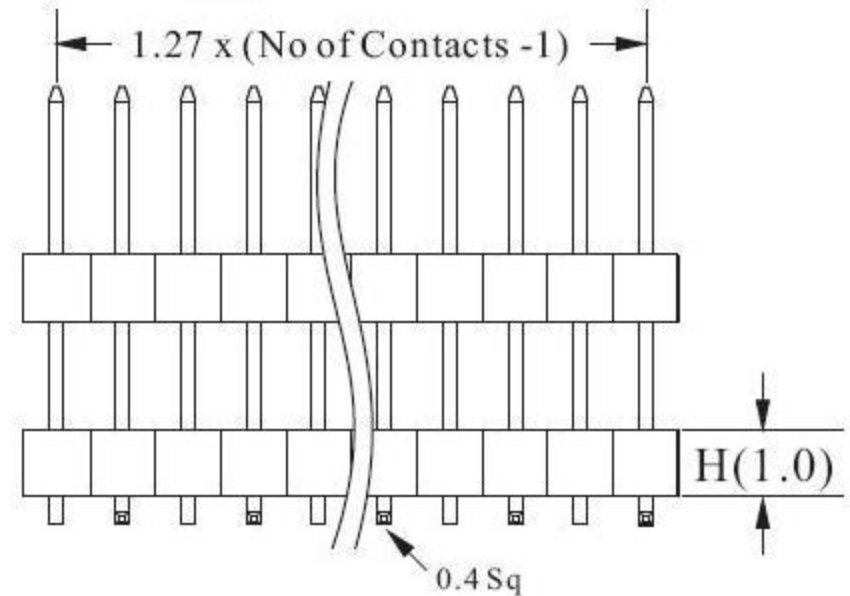
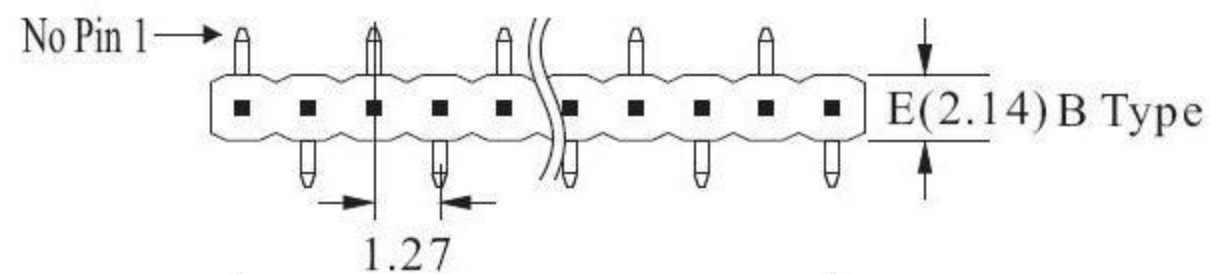


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	hung	2010/08/17

ORDER INFORMATION

1716X 02 00 X
 Plating:
 3: All Gold
 No. Of Contact
 H:1.0 2/77.5/3.5
 Type:
 60:A type
 64:B type

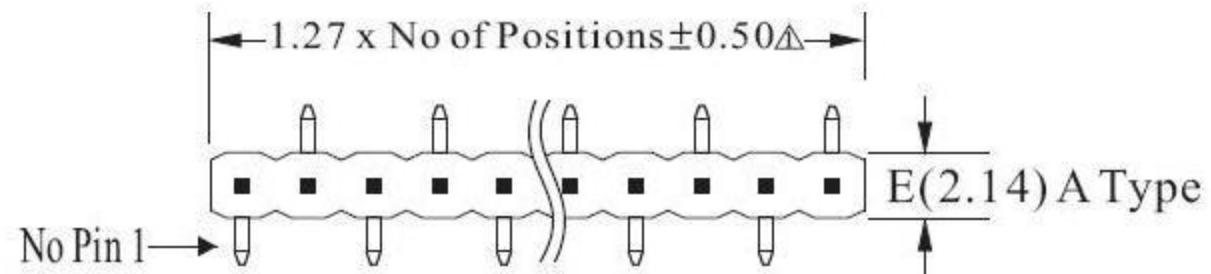


SPECIFICATIONS

Current Rating : 1 Amps
 Insulator resistance : 5000 Megohms
 Dielectric withstanding : AC 500V
 Operating Temperature : -40 °C ~ +105°C

MATERIAL :

Housing : High Temperature Thermoplastic
 Terminal : Brass

Recommended P.C.Board Hole Layout :

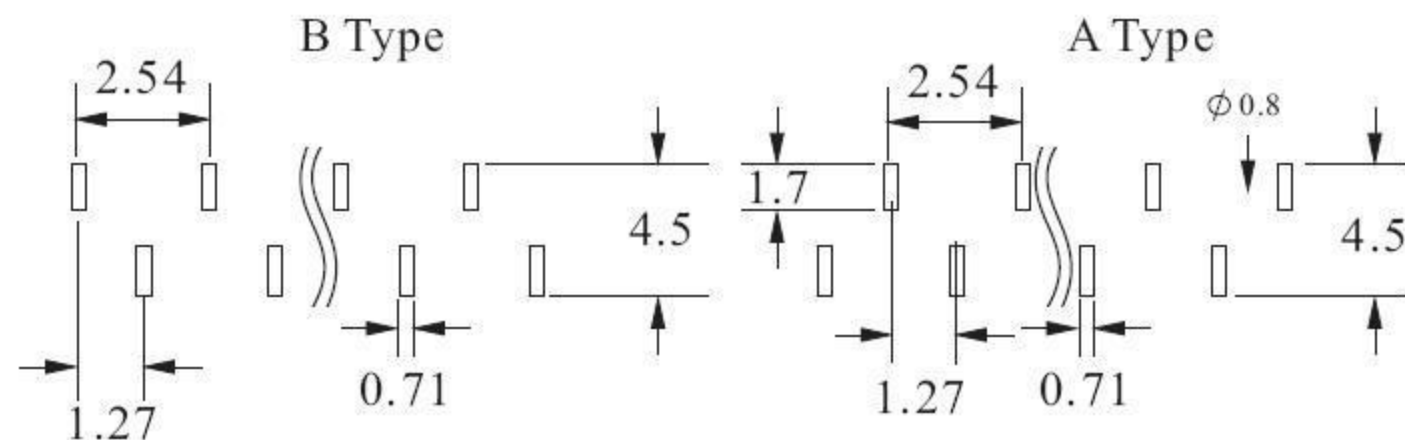

		ACMELUX CO., LTD.	
		TEL:886-85124595	FAX:886-85124322
0.0± 0.30	SCALE: 1:1	TITLE:	PART NO:
0.00± 0.20	UNIT: mm	1.27mm Dual Plastic Single Row Header SMD Series	APP BY: Hung
0.000±0.10		MATL: RoHS	CHK BY: Cheryl
		DWG. NO. C1716X0200X	DR BY: Amos A225