





CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-10-28

ORDER INFORMATION

171 6X 03 XX X

- 3:Plating Gold Flash
- No. of Contact
- H:1.0 2/4/3.5
- 60:A Type
- 64:B Type

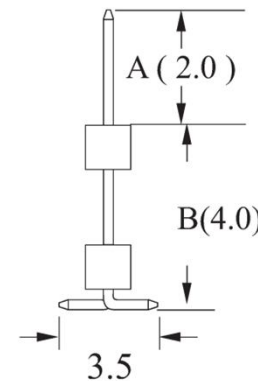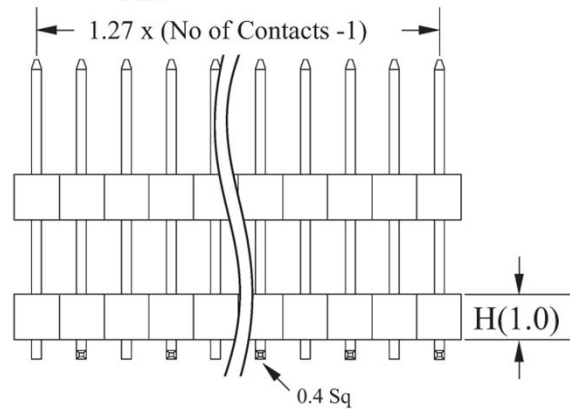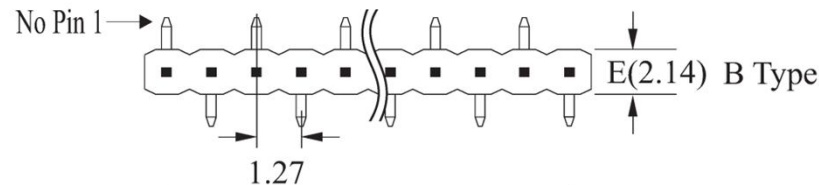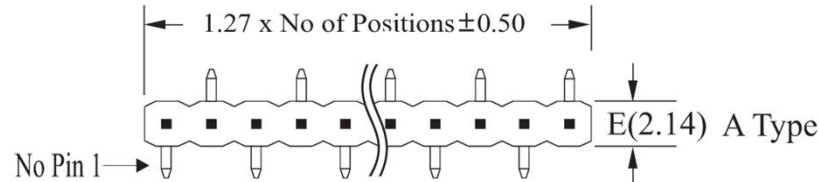


SPECIFICATIONS



- Current Rating : 1 Amps
- Insulator resistance : 5000 Megohms
- Dielectric withstanding : AC 500V
- Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MATERIAL :

- Housing : High Temperature Thermoplastic
- Terminal : Brass)

Recommended P.C.Board Hole Layout :

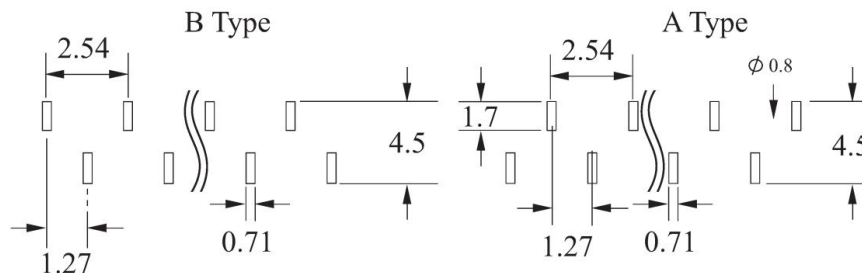

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL:886-2-85124595 FAX:886-2-85124322			
0.0 ± 0.30 0.00 ± 0.20 0.000 ± 0.15	SCALE: 1:1 UNIT: mm	TITLE: Pitch 1.27mm Single Row SMT Type Pin Header Connector	PART NO: APP BY: Hung CHK BY: Cheryl DR BY: Amos
		MATL: RoHS DWG. NO. C1716X03XXX	A225