

CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-09-01

ORDER INFORMATION

171 88 02 XX X

3:Plating Gold Flash

No. of Contact

02:H=1.0mm 3.5 / 4.4 / 4.0

88:雙排雙塑SMT有柱 Type

SPECIFICATIONS

Current Rating : 1 Amps

Insulator resistance : 5000 Megohms



Dielectric withstanding : AC 500V

Operating Temperature : -40°C ~ +105°C



MATERIAL :

Housing : High Temperature Thermoplastic

Terminal : Brass

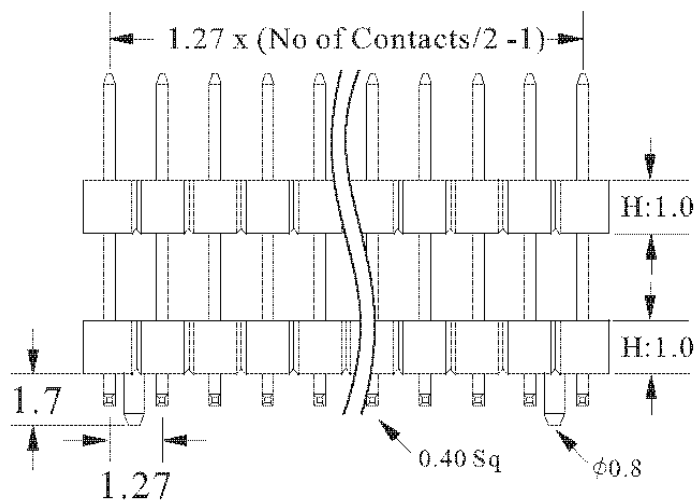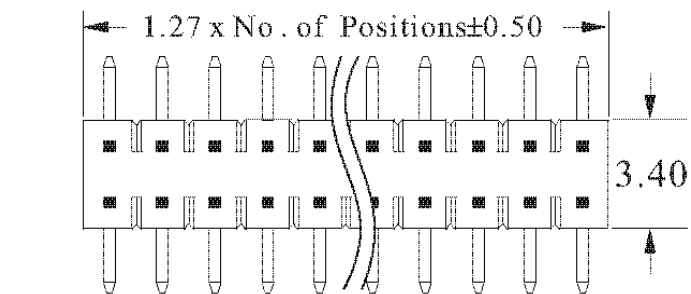

Recommended P.C.Board Hole Layout :

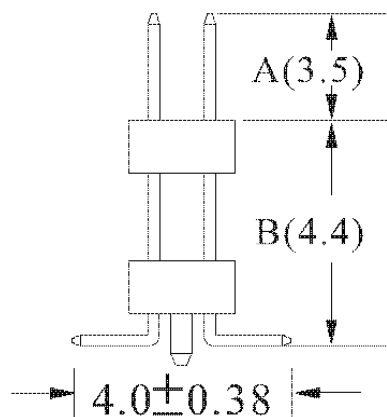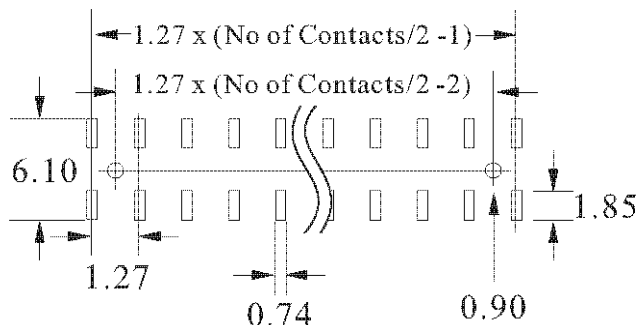

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL: 886-2-85124595 FAX: 886-2-85124322

0.0±0.30	Scale: 1:1	Title: Pitch 1.27*1.27mm Dual Plastics Dual Rows SMT Type Pin Header Connector	PART NO:
0.00±0.20	Unit: mm		APP BY: <i>Hung</i>
0.000±0.15			CHK BY: <i>Cheryl</i>
		Material: RoHS	DR BY: <i>Amos</i>
		DWG. NO. C1718802XXX	A225