

CUSTOMER COPY


REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-09-10

ORDER INFORMATION


171 88 03 XX X

- 1:Plating Tin
- 3:Plating Gold Flash
- No. of Contact
- 03:H=1.0mm 3.5/5.5/4.4
- 88:雙排雙塑SMT有柱 Type



A

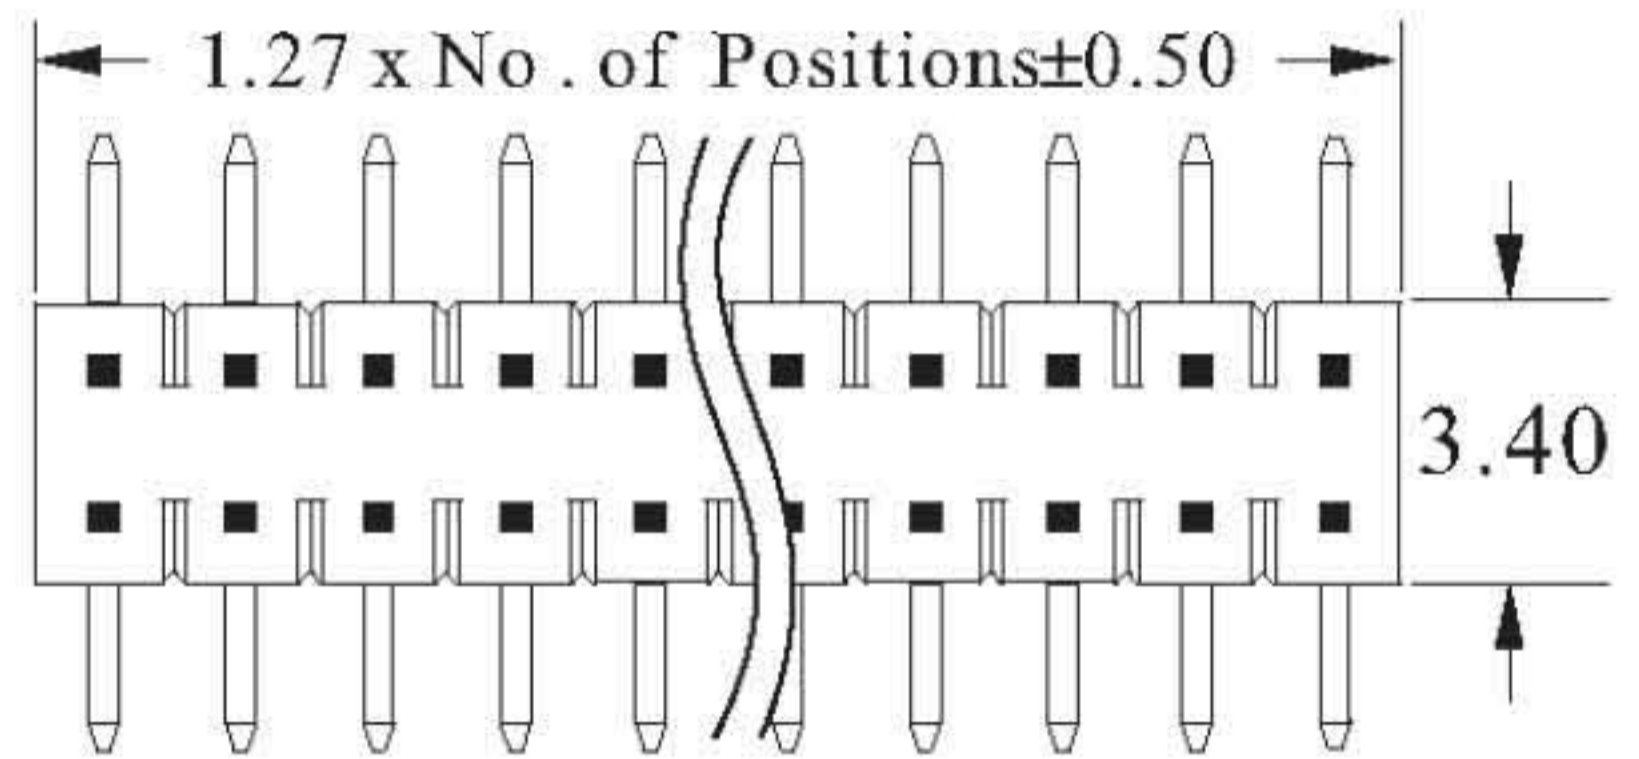

B

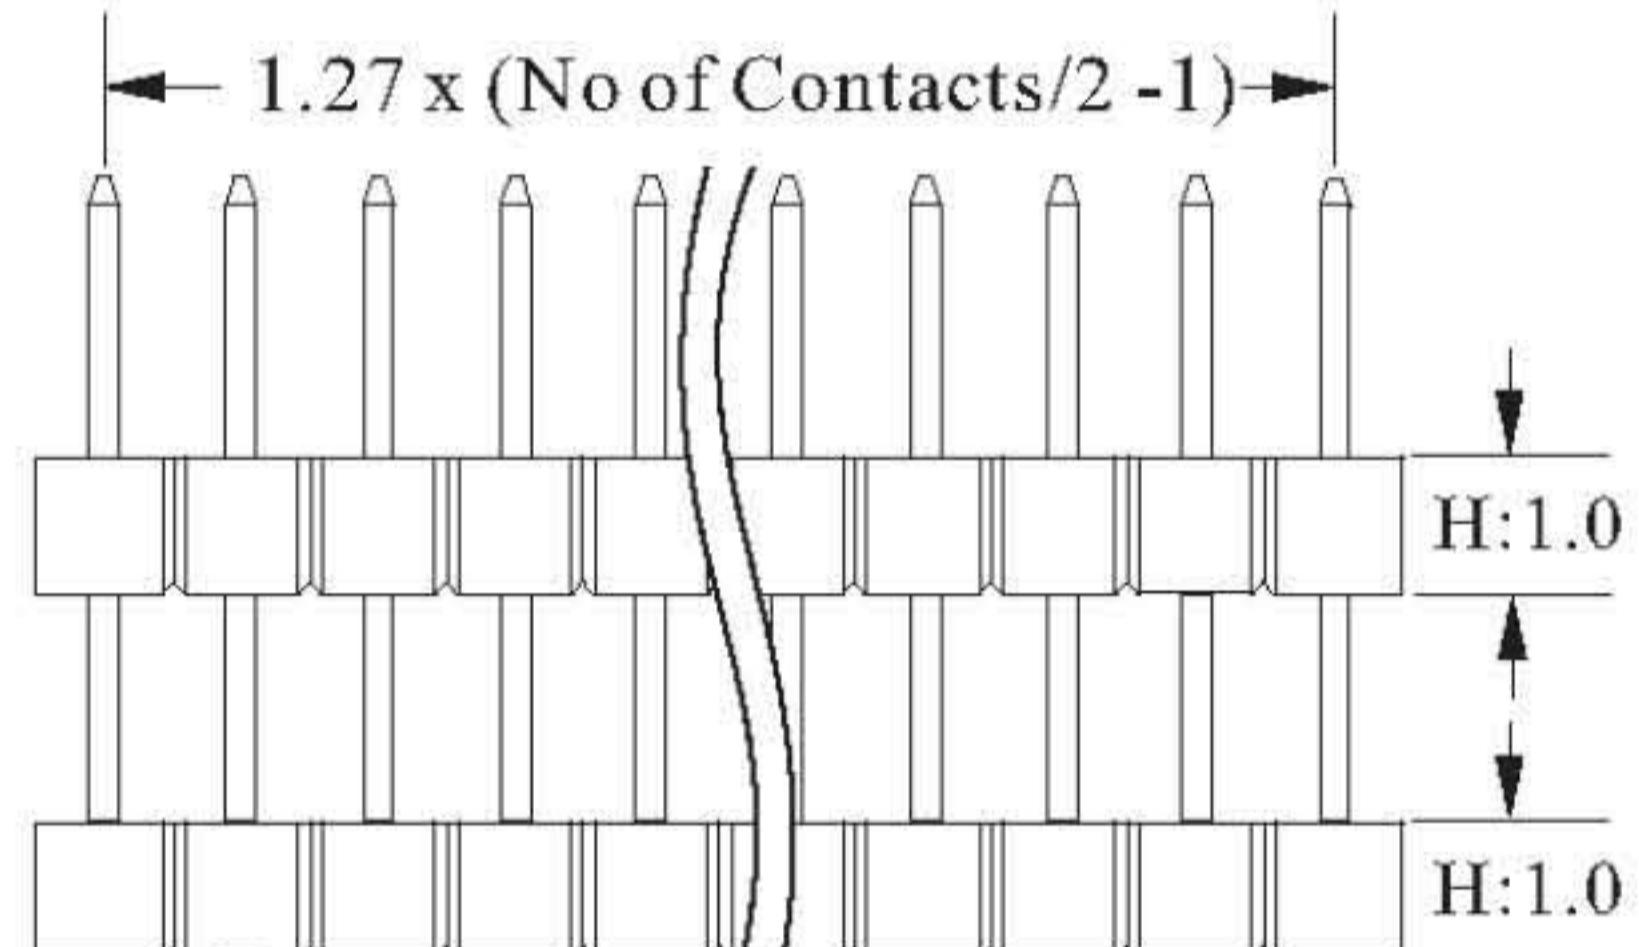

C

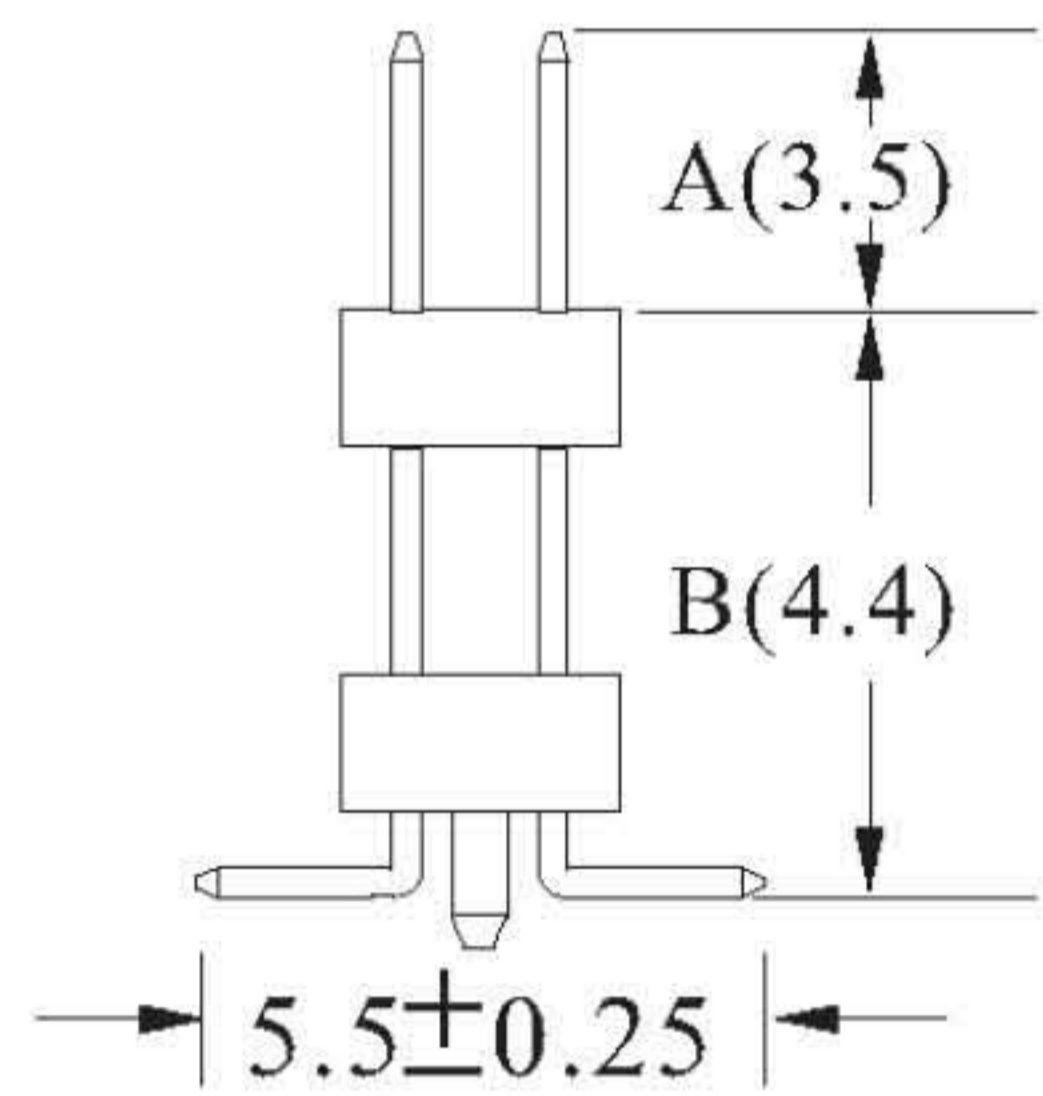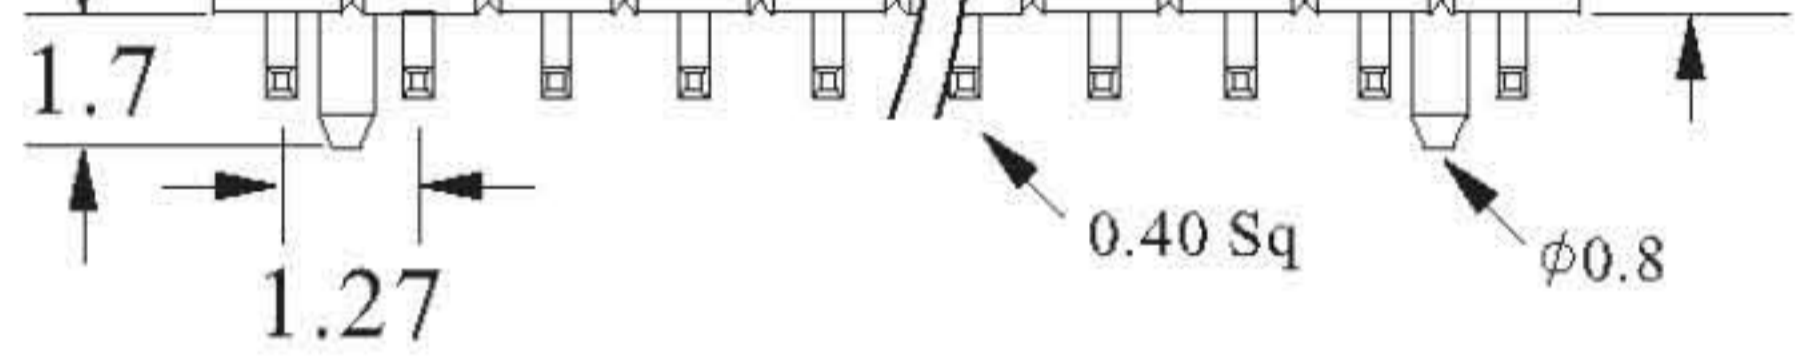


SPECIFICATIONS

- Current Rating : 1 Amps
- Insulator resistance : 5000 Megohms
- Dielectric withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C
- Contact resistance: 20 m ohms max

MATERIAL :

- Housing : High Temperature Thermoplastic
- Terminal : Brass

Recommended P.C.Board Hole Layout :

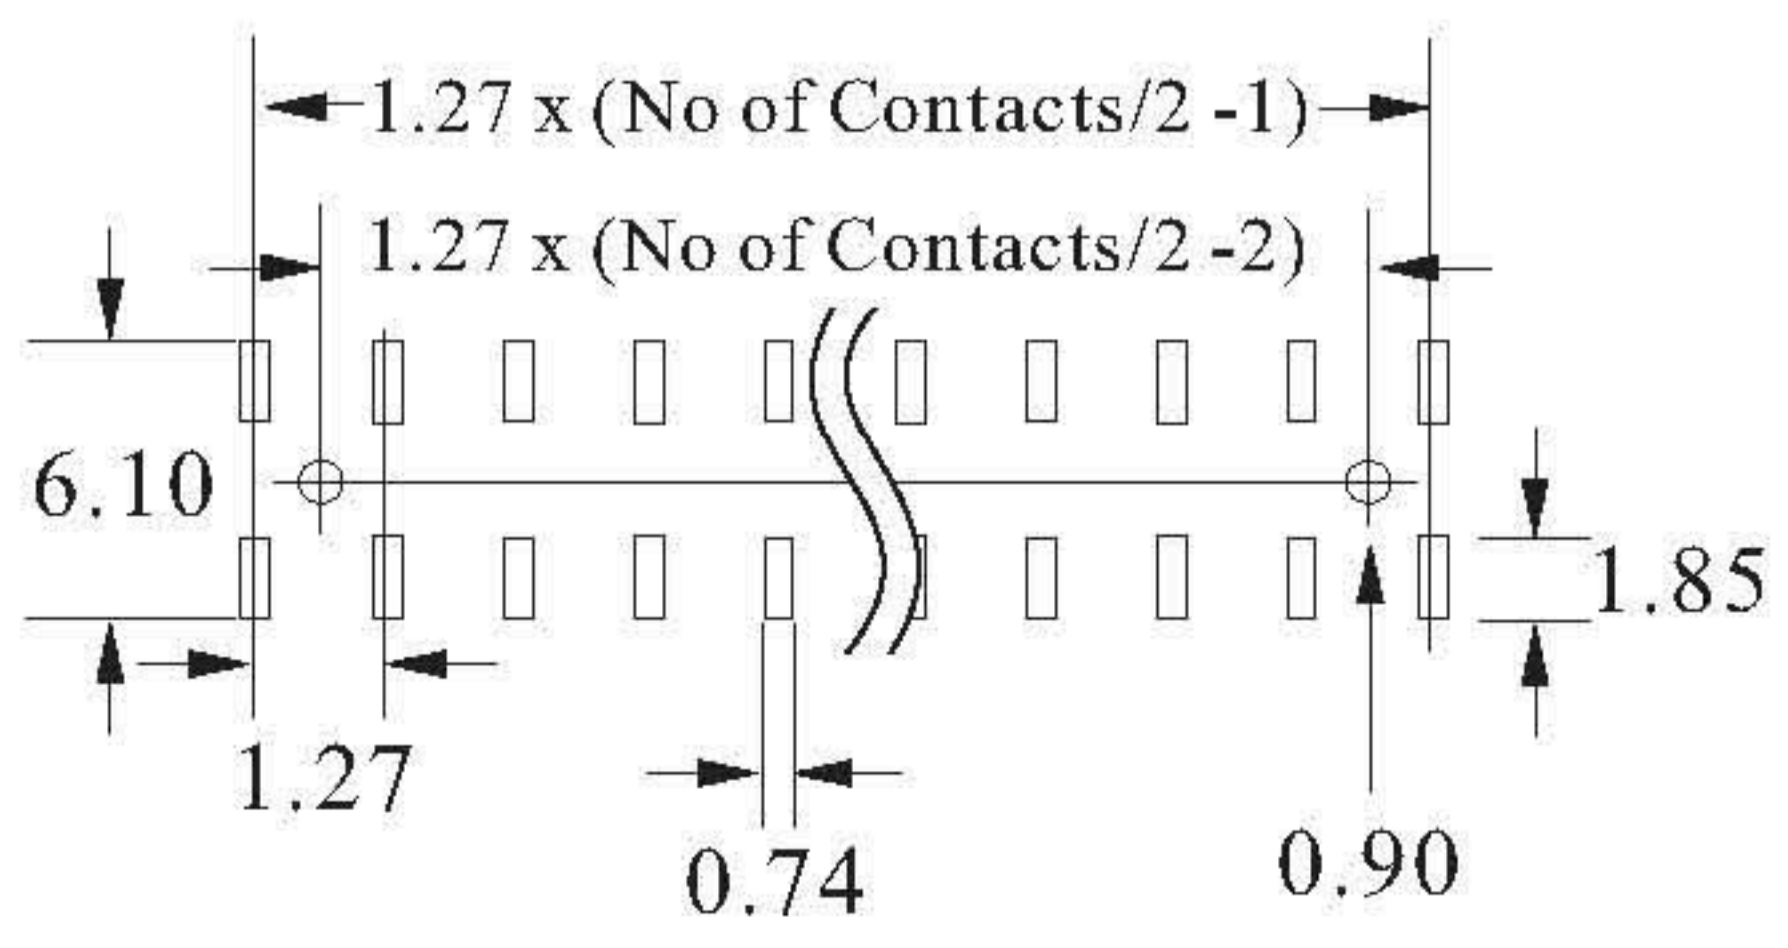

 鈺滿榮企業股份有限公司 ACMELUX CO., LTD. TEL: 886-2-85124595 FAX: 886-2-85124322		PART NO:	
		APP BY: <i>Hung</i>	
0.0±0.30 Scale: 1:1 0.00±0.20 Unit: mm 0.000±0.15		Title: Pitch 1.27*1.27mm Dual Platics Dual Rows SMT Type Pin Header Connector	
		Material: RoHS DWG. NO. C1718803XXX	
		CHK BY: <i>Cheryl</i> DR BY: <i>Amos</i>	
		A225	

D

D