

**CUSTOMER COPY**




REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2010-10-28

**ORDER INFORMATION**

171 88 04 XX X

- 1:Plating Tin
- 3:Plating Gold Flash
- No. of Contact
- 04:H=1.0mm 3.0/5.1/11.1
- 88:雙排雙邊有柱 SMT Type

**Recommended P.C.Board Hole Layout :**

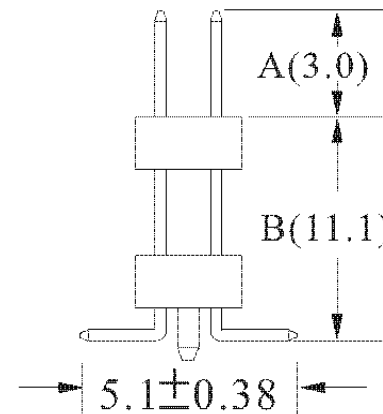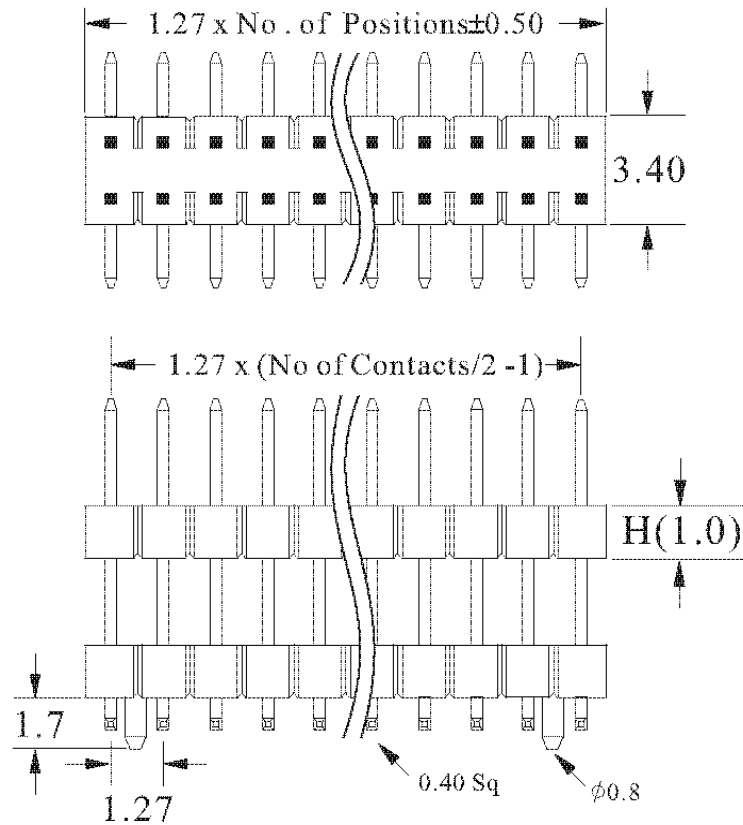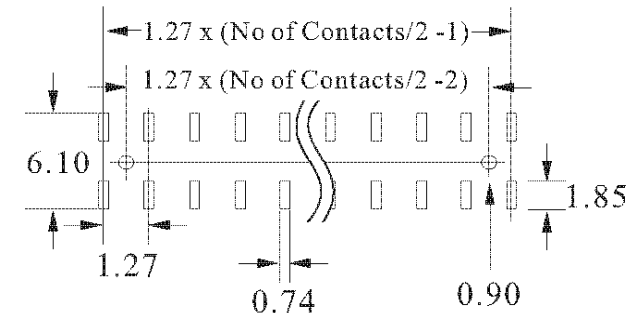

**SPECIFICATIONS**

- Current Rating : 1 Amps
- Insulator resistance : 5000 Megohms
- Dielectric withstanding : AC 500V
- Operating Temperature : -40°C ~ +105°C

**MATERIAL :**

- Housing : High Temperature Thermoplastic
- Terminal : Brass 65/35(C2680)

RoHS



鈺滿榮企業股份有限公司 ACME LUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE: Pitch 1.27mm Double Plastic Dual Rows SMT Type Pin Header Connector	PART NO:
0.00±0.20	UNIT: mm		APP BY: Hung
0.000±0.15			CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1718804XXX	A225