
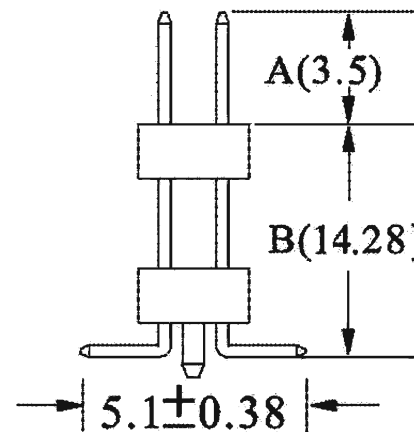
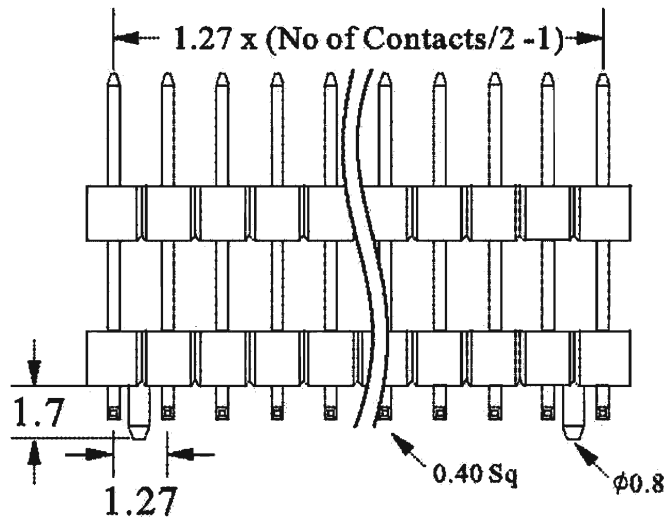
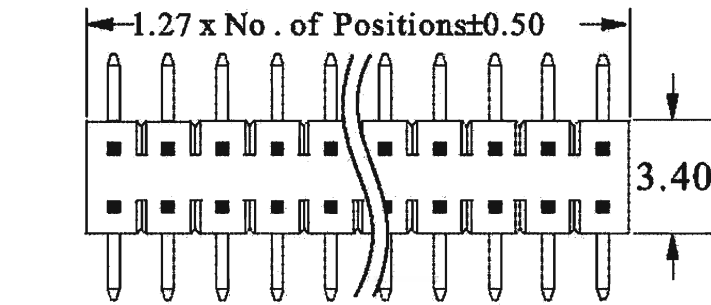


CUSTOMER COPY

REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2011-10-04

ORDER INFORMATION

171 88 06 XX X

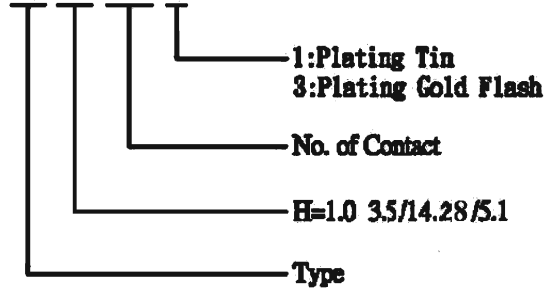


SPECIFICATIONS

Current Rating : 1 Amps
 Insulator resistance : 5000 Megohms
 Dielectric withstanding : AC 500V
 Operating Temperature : -40°C ~ +105°C

MATERIAL :

Housing : High Temperature Thermoplastic
 Terminal : Brass

Recommended P.C.Board Hole Layout :

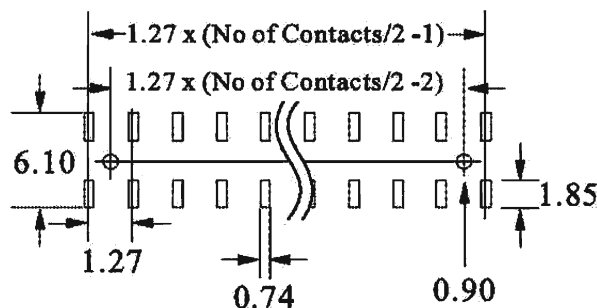

鈺滿榮企業股份有限公司 ACME LUX CO., LTD.
 TEL: 886-2-85124595 FAX: 886-2-85124322

0.01±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.27mm*1.27mm SMD	APP BY: Hung
0.000±0.15		Dual Row Type Pin Header	CHK BY: Cheryl
		MATL: RoHS	DR BY: Amos
		DWG. NO. C1718806XXX	A225