


CUSTOMER COPY



REV.	DESCRIPTION	APP.	DATE
A	NEW DESIGN	Amos	2012-03-20

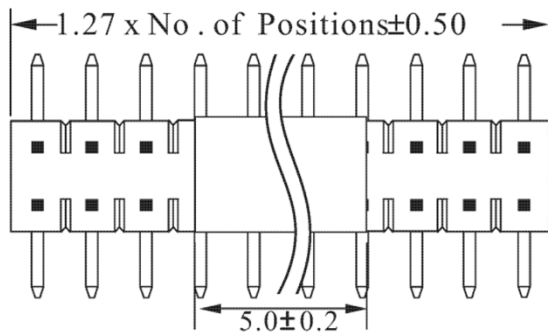

ORDER INFORMATION

171 89 00 XX X

- 3: Plating Gold Flash
- No. of Contact
- H=1.0mm 3/4.9/5.1 管裝
- SMT 有柱 + Cap Type

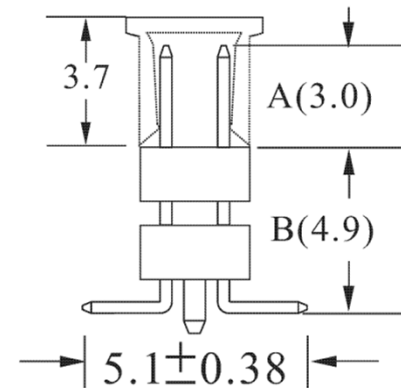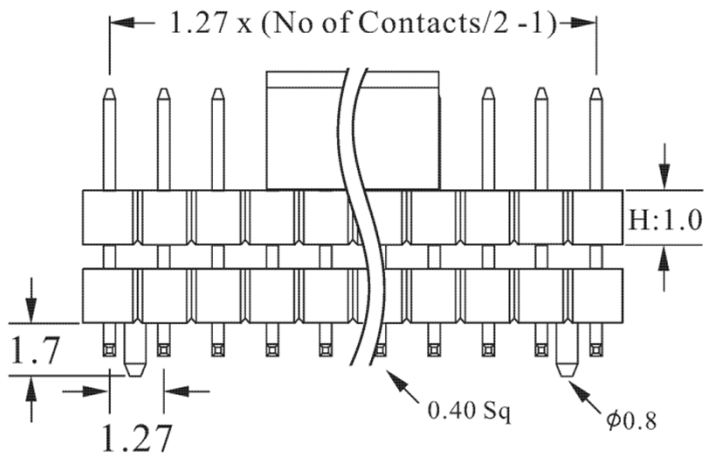


SPECIFICATIONS

- Current Rating : 1 Amps
- Insulator resistance : 5000 Megohms
- Dielectric withstanding : AC 500V
- Operating Temperature : $-40^{\circ}\text{C} \sim +105^{\circ}\text{C}$

MATERIAL :

- Housing : High Temperature Thermoplastic
- Terminal : Brass

Recommended P.C.Board Hole Layout :

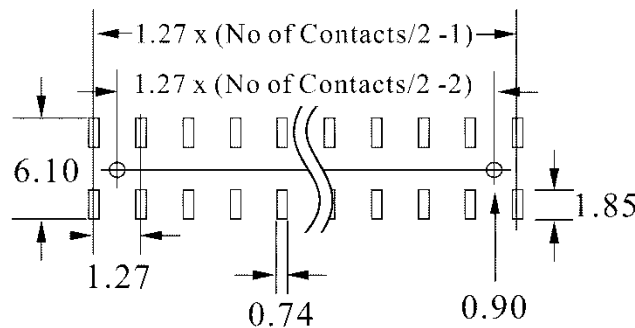

鈺滿榮企業股份有限公司 ACMELUX CO., LTD.

TEL:886-2-85124595

FAX:886-2-85124322

0.0±0.30	SCALE: 1:1	TITLE:	PART NO:
0.00±0.20	UNIT: mm	Pitch 1.27mm Dual Rows Dual Base SMT Type Pin Header Connector	APP BY: <i>Hung</i>
0.000±0.15		MATL: RoHS	CHK BY: <i>Cheryl</i>
		DWG. NO. C1718900XXX	DR BY: <i>Amos</i>

A225